

FIG. 1

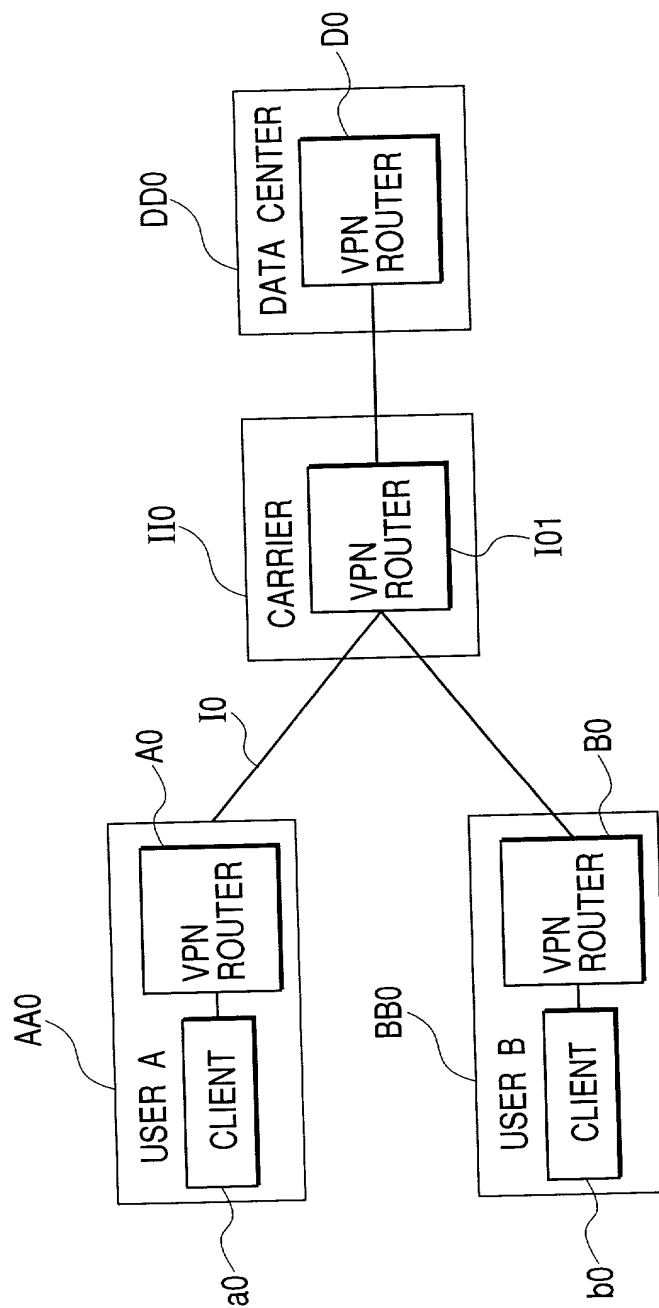


FIG. 2

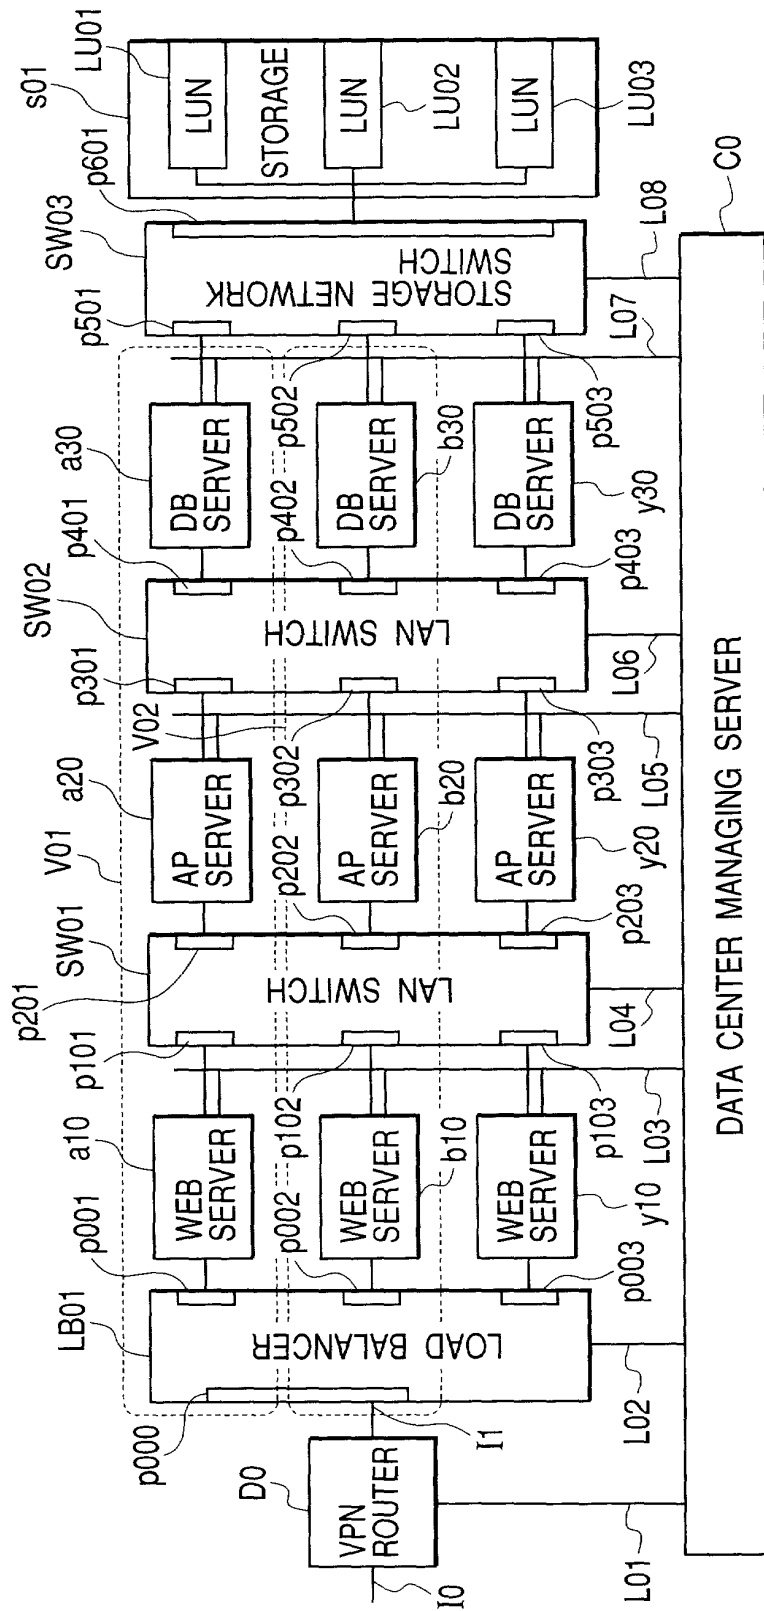


FIG. 3

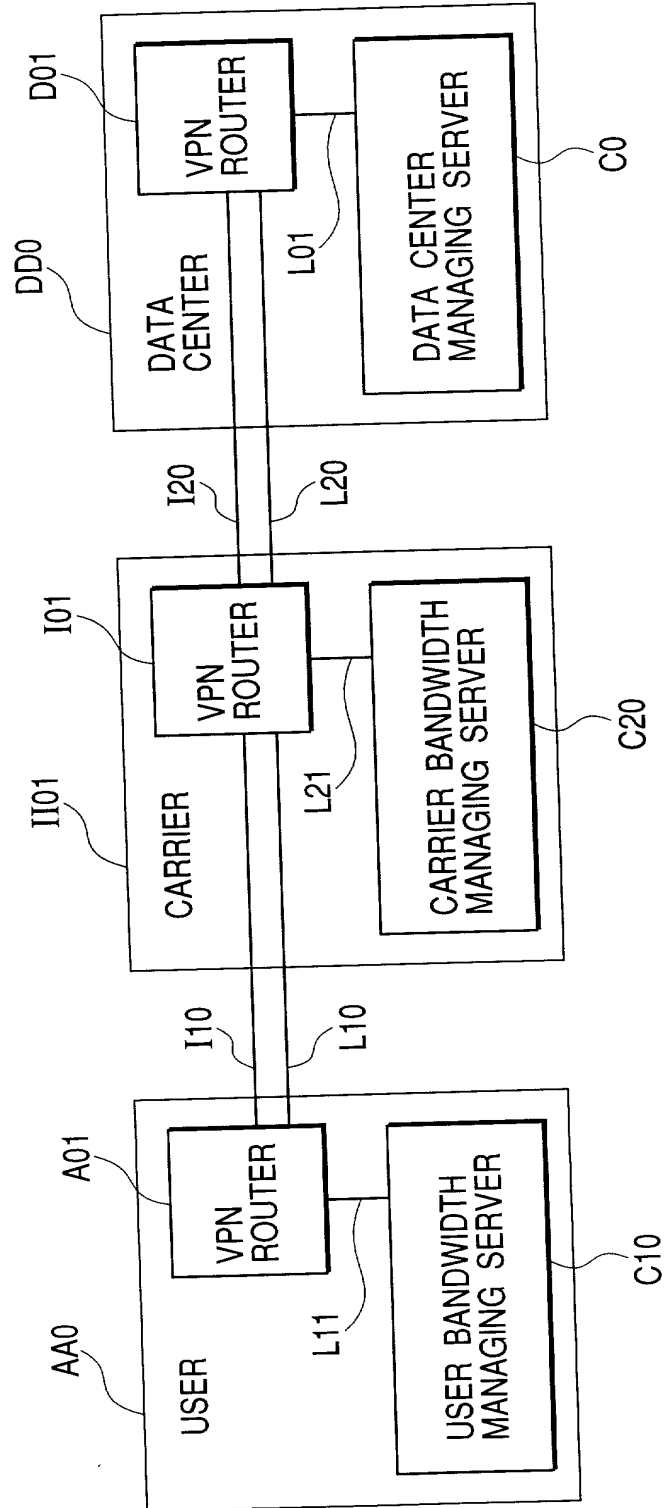


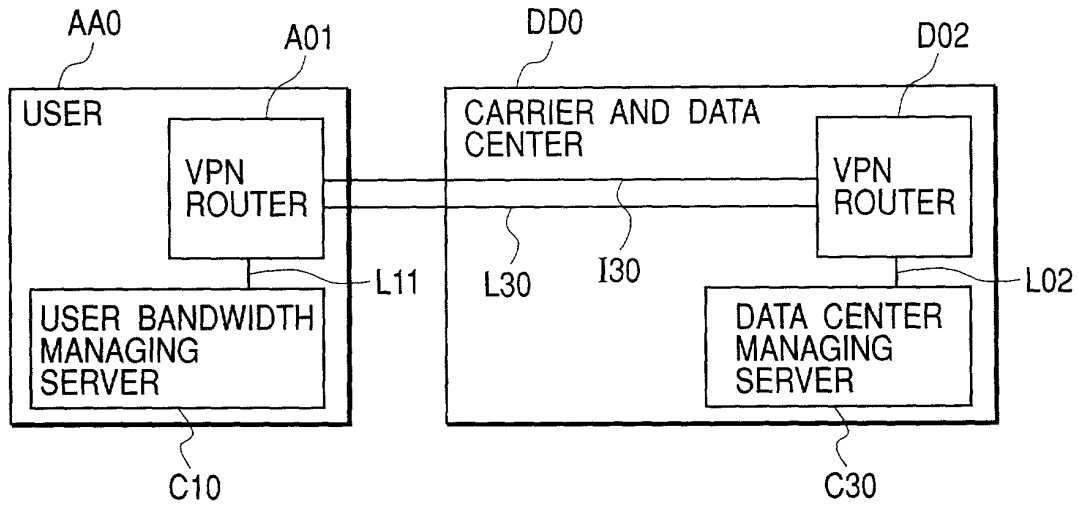
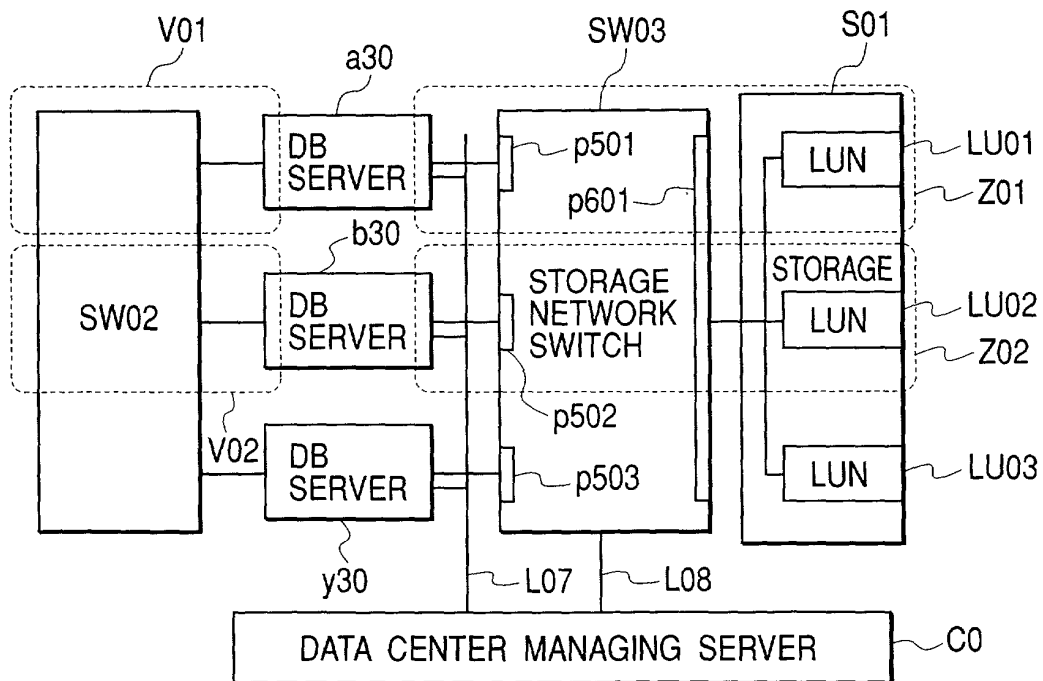
FIG. 4**FIG. 5**

FIG. 6

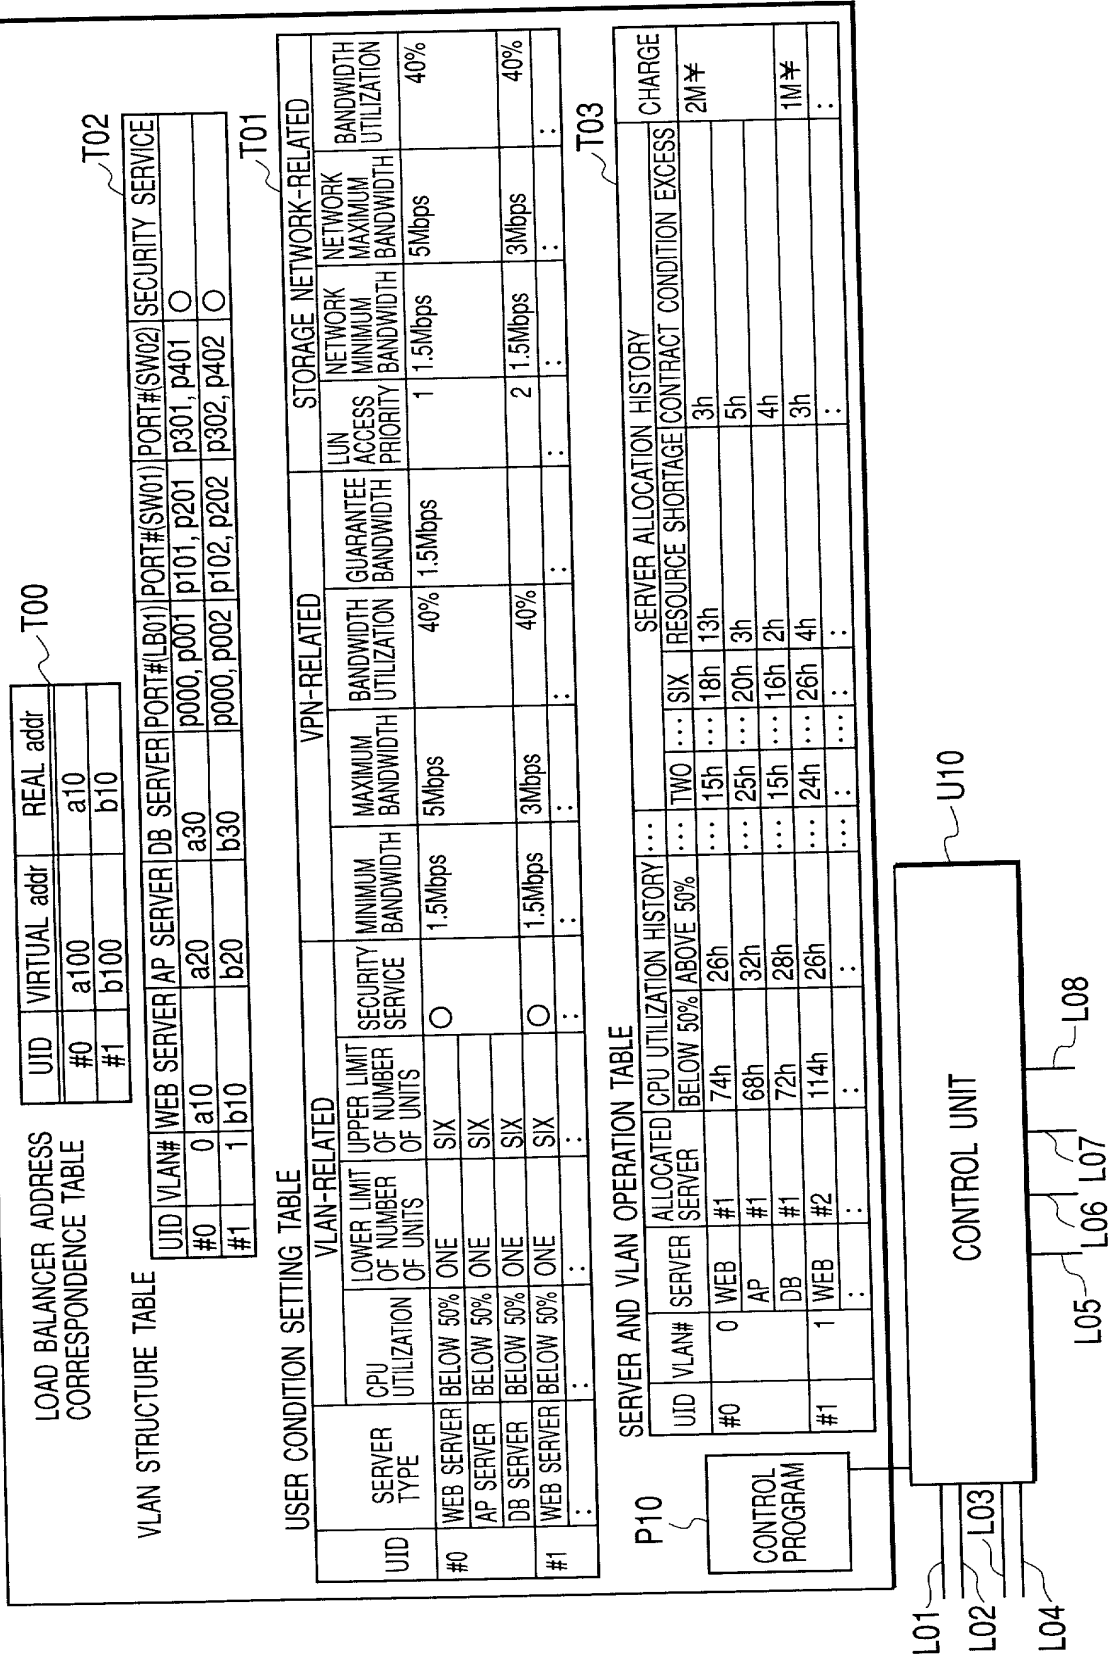


FIG. 7

USER CONDITION SETTING TABLE

UID	VLAN-RELATED				VPN-RELATED			STORAGE NETWORK-RELATED			
	CPU UTILIZATION	LOWER LIMIT OF NUMBER OF UNITS	UPPER LIMIT OF NUMBER OF UNITS	SECURITY SERVICE	MINIMUM BANDWIDTH	MAXIMUM BANDWIDTH	BANDWIDTH UTILIZATION	GUARANTEE BANDWIDTH	LUN ACCESS PRIORITY	NETWORK MINIMUM BANDWIDTH	NETWORK MAXIMUM BANDWIDTH
#0	WEB SERVER BELOW 50%	ONE	SIX	○	1.5Mbps	5Mbps	40%	1.5Mbps	1	1.5Mbps	5Mbps
	AP SERVER BELOW 50%	ONE	SIX								
	DB SERVER BELOW 50%	ONE	SIX								
#1	WEB SERVER BELOW 50%	ONE	SIX	○	1.5Mbps	3Mbps	40%		2	1.5Mbps	3Mbps
:	:	:	:	:	:	:	:	:	:	:	:

T01

VPN SETTING

UID	BANDWIDTH UTILIZATION	MINIMUM BANDWIDTH	MAXIMUM BANDWIDTH	GUARANTEE BANDWIDTH	CURRENT USE BANDWIDTH
#0	40%	1.5Mbps	5Mbps	1.5Mbps	1.5Mbps
#1	40%	1.5Mbps	3Mbps		1.5Mbps

T04

VPN OPERATING STATE

UID	VPN ROUTER	BANDWIDTH UTILIZATION			ALLOCATED BANDWIDTH HISTORY				CHARGE
		BELOW 40%	40% ABOVE	5Mbps	RESOURCE SHORTAGE	CONTRACT	CONDITION	EXCESS	
#0	USER	60h	40h	14h	2h	14h			0.5M ¥
	CARRIER	55h	45h	13h	3h	12h			
	DATA CENTER	63h	37h	15h	4h	10h			
#1	USER	67h	33h	14h	3h	4h			0.5M ¥
:	:	:	:	:	:	:			:

T05

P10

CONTROL PROGRAM

CONTROL UNIT

U10

L01

L10

L20

FIG. 8

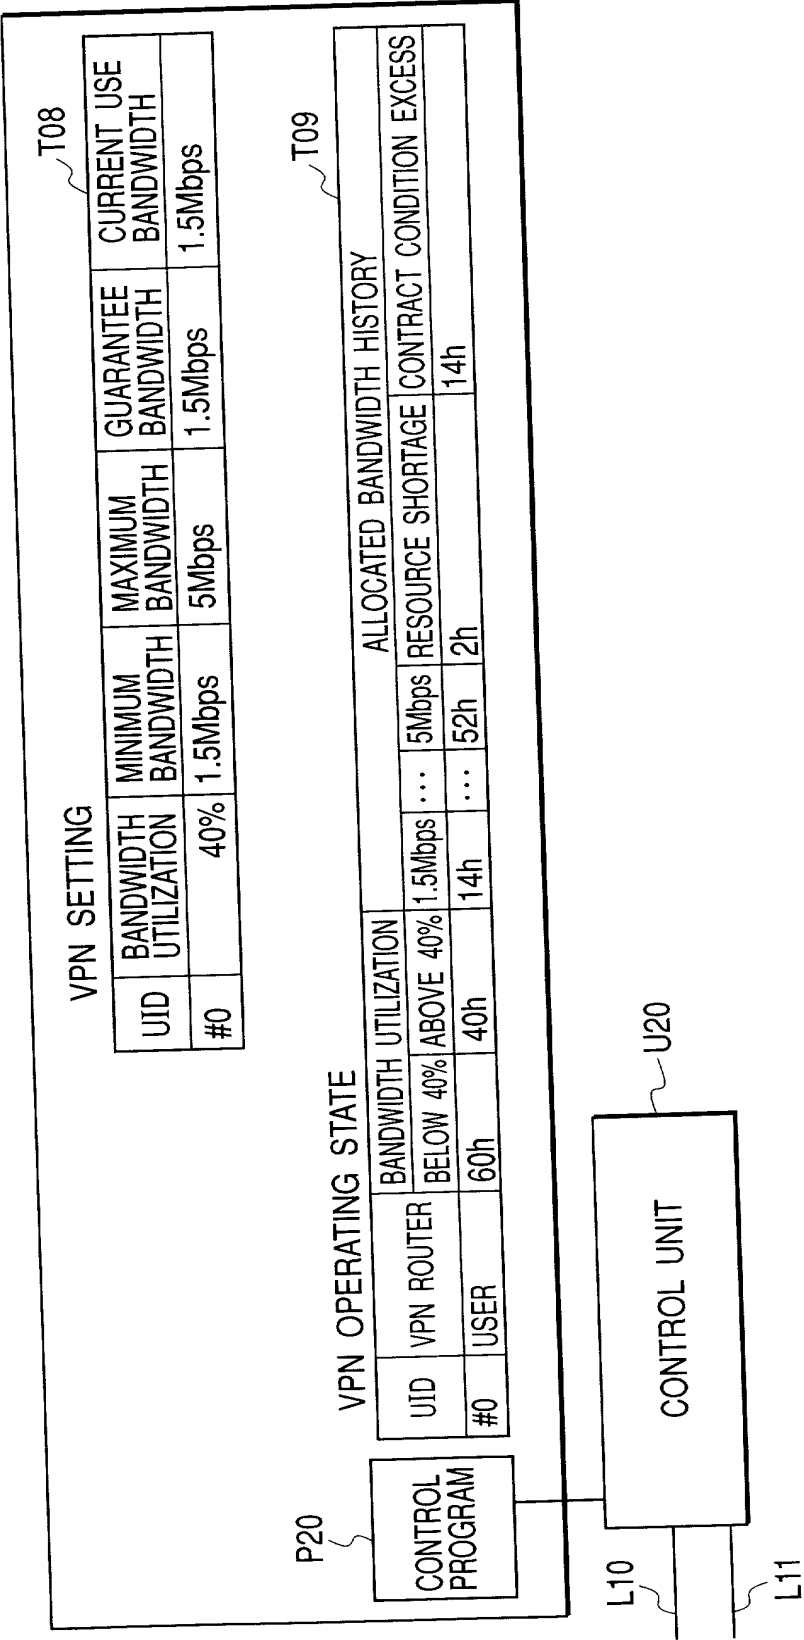


FIG. 9

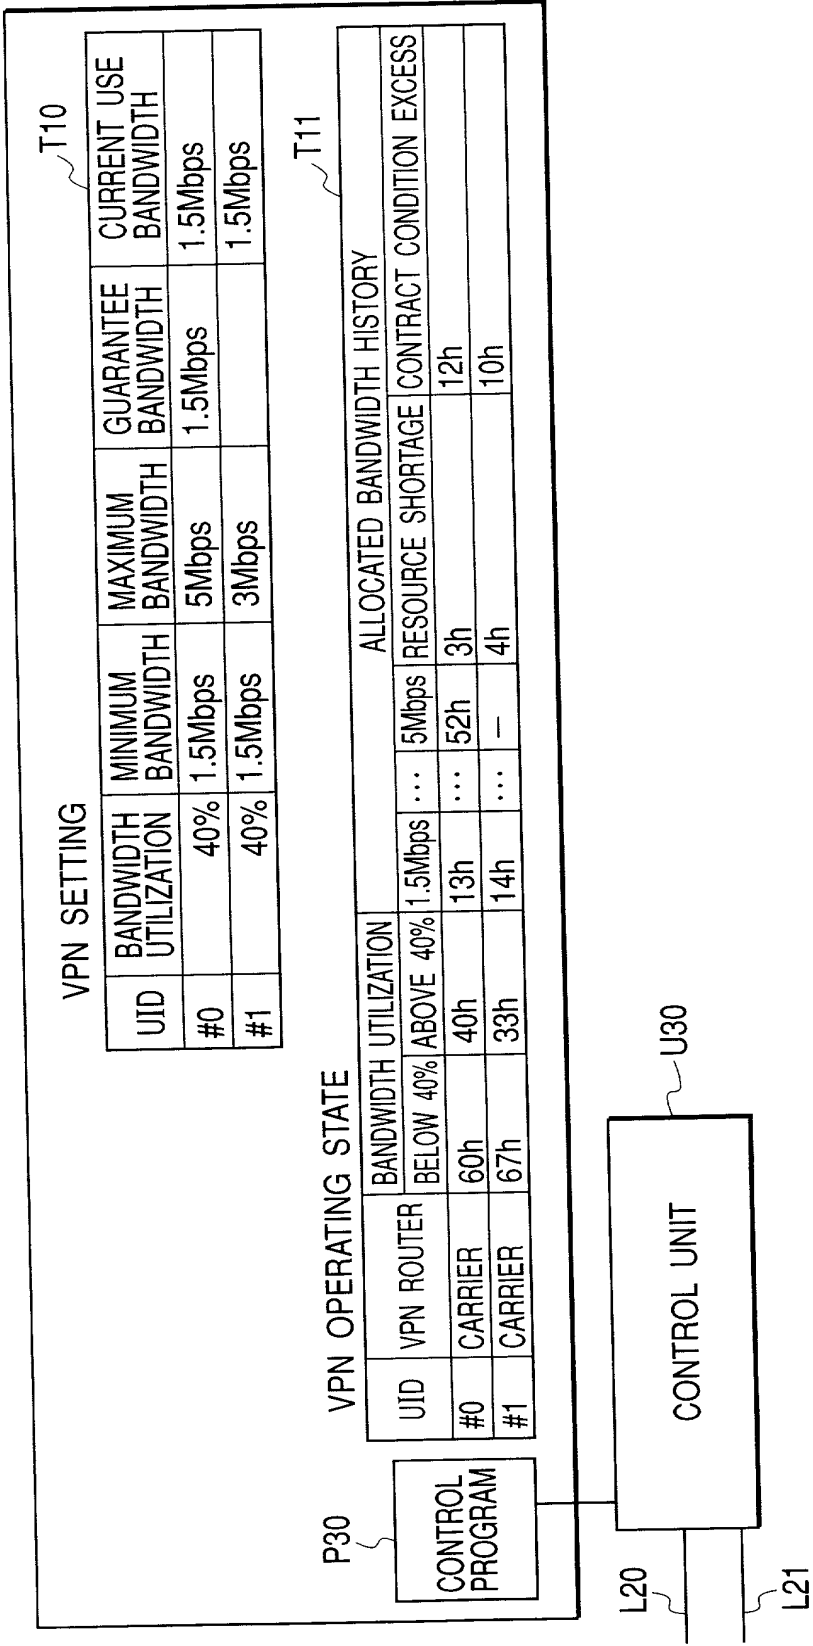


FIG. 10

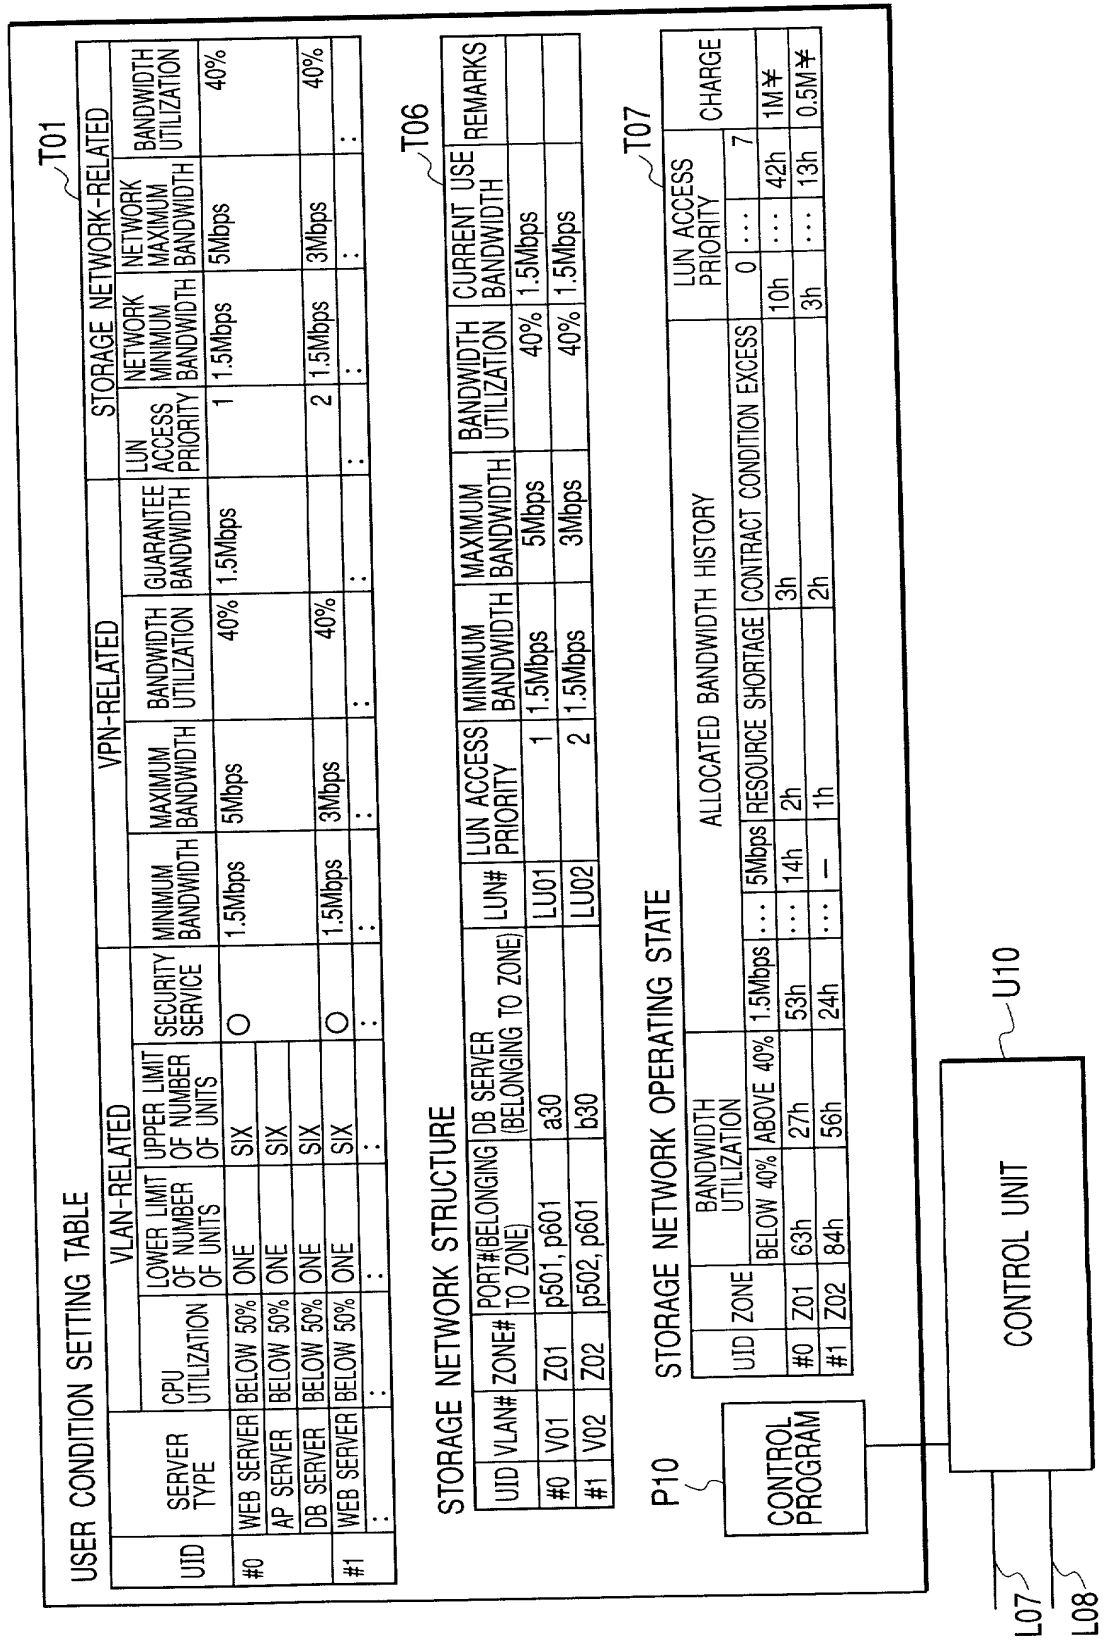


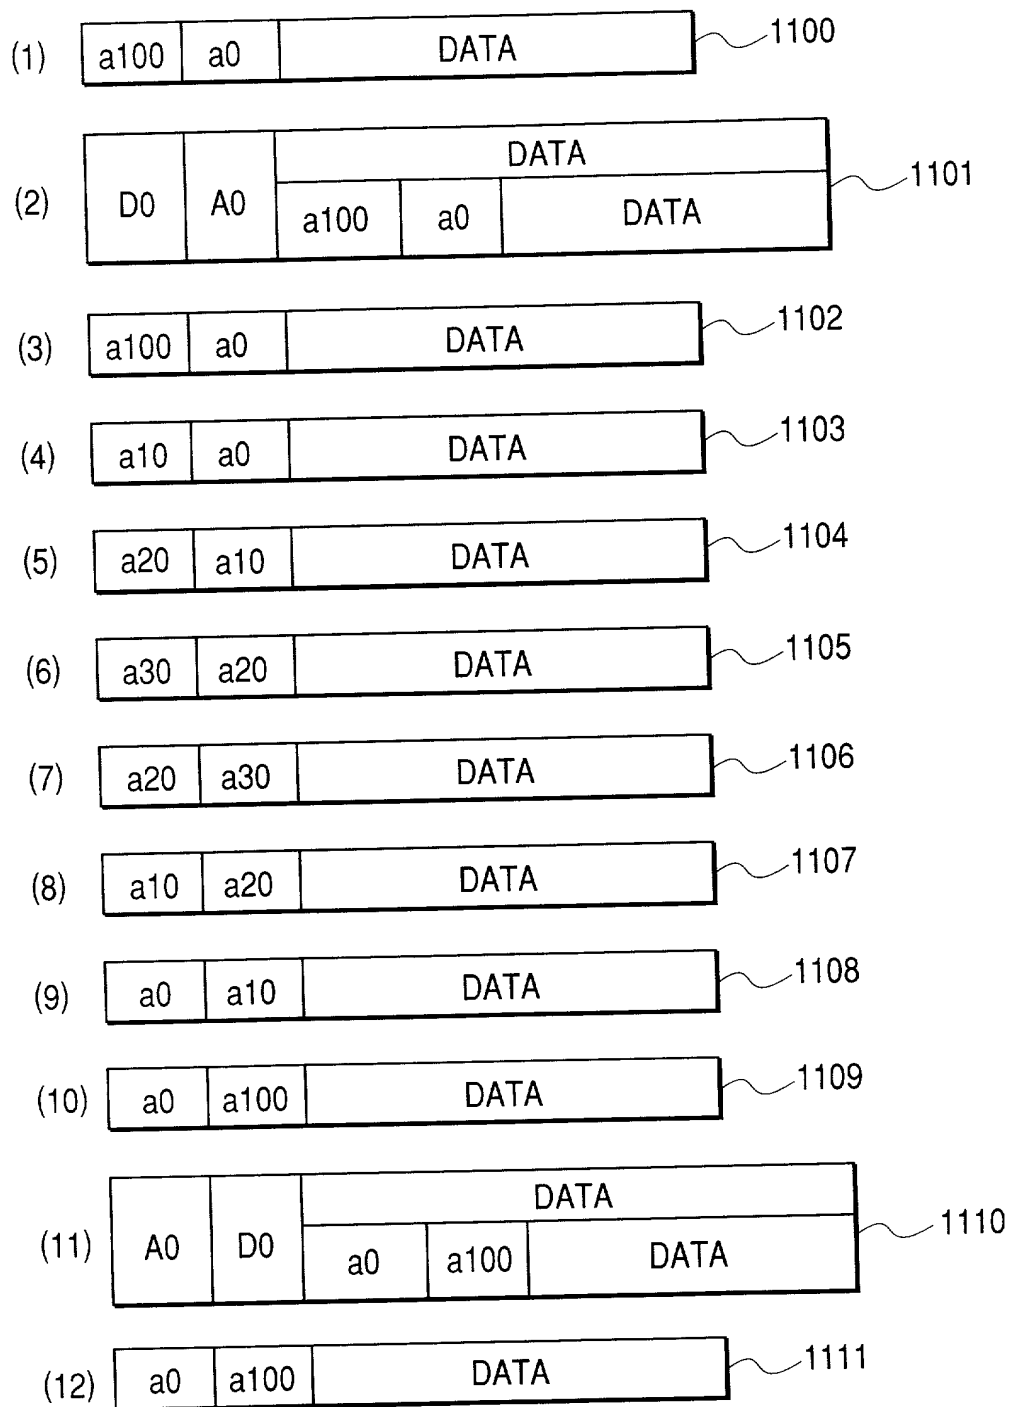
FIG. 11

FIG. 12

U01

SERVICE LEVEL CONDITION INPUT SCREEN (OPTION SELECTION)

SECURITY OPTION SERVICE

· USER-DEDICATED VLAN AND VPN CONFIGURATION

NOT REQUIRED ☐ REQUIRED ☒

RELIABILITY OPTION SERVICE

· NETWORK BANDWIDTH GUARANTEE CONFIGURATION

NOT REQUIRED ☐ REQUIRED ☒

FIG. 13

U02

SERVICE LEVEL CONDITION INPUT SCREEN

REPRESENTATIVE ADDRESS

USE SERVER TYPE	NUMBER OF SERVERS	USE CONDITION
	LOWER LIMIT	UPPER LIMIT
WEB SERVER <input checked="" type="checkbox"/>	ONE	SIX
AP SERVER <input checked="" type="checkbox"/>	ONE	SIX
DB SERVER <input checked="" type="checkbox"/>	ONE	SIX

CPU UTILIZATION ..

BELOW 50%

BELOW 50%

BELOW 50%

☒ VPN OPTION (FILL IN IF SELECTED)

NETWORK BANDWIDTH

MINIMUM	MAXIMUM	USE CONDITION
1.5 Mbps	5 Mbps	BANDWIDTH UTILIZATION
		BELOW 40%

STORAGE NETWORK BANDWIDTH

MINIMUM	MAXIMUM	USE CONDITION
1.5 Mbps	5 Mbps	BANDWIDTH UTILIZATION
		BELOW 40%

U03

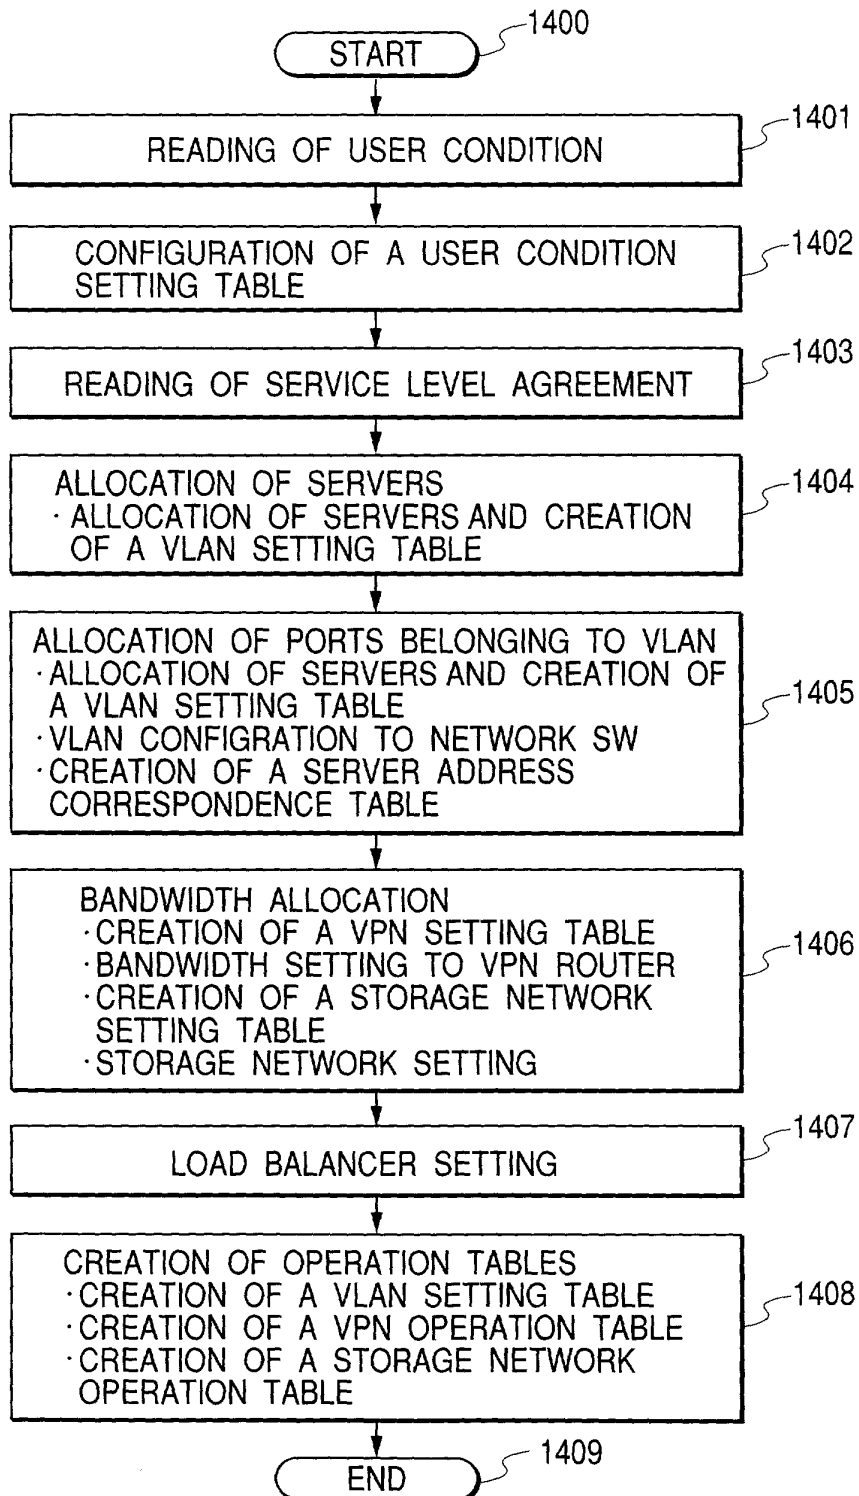
FIG. 14

FIG. 15

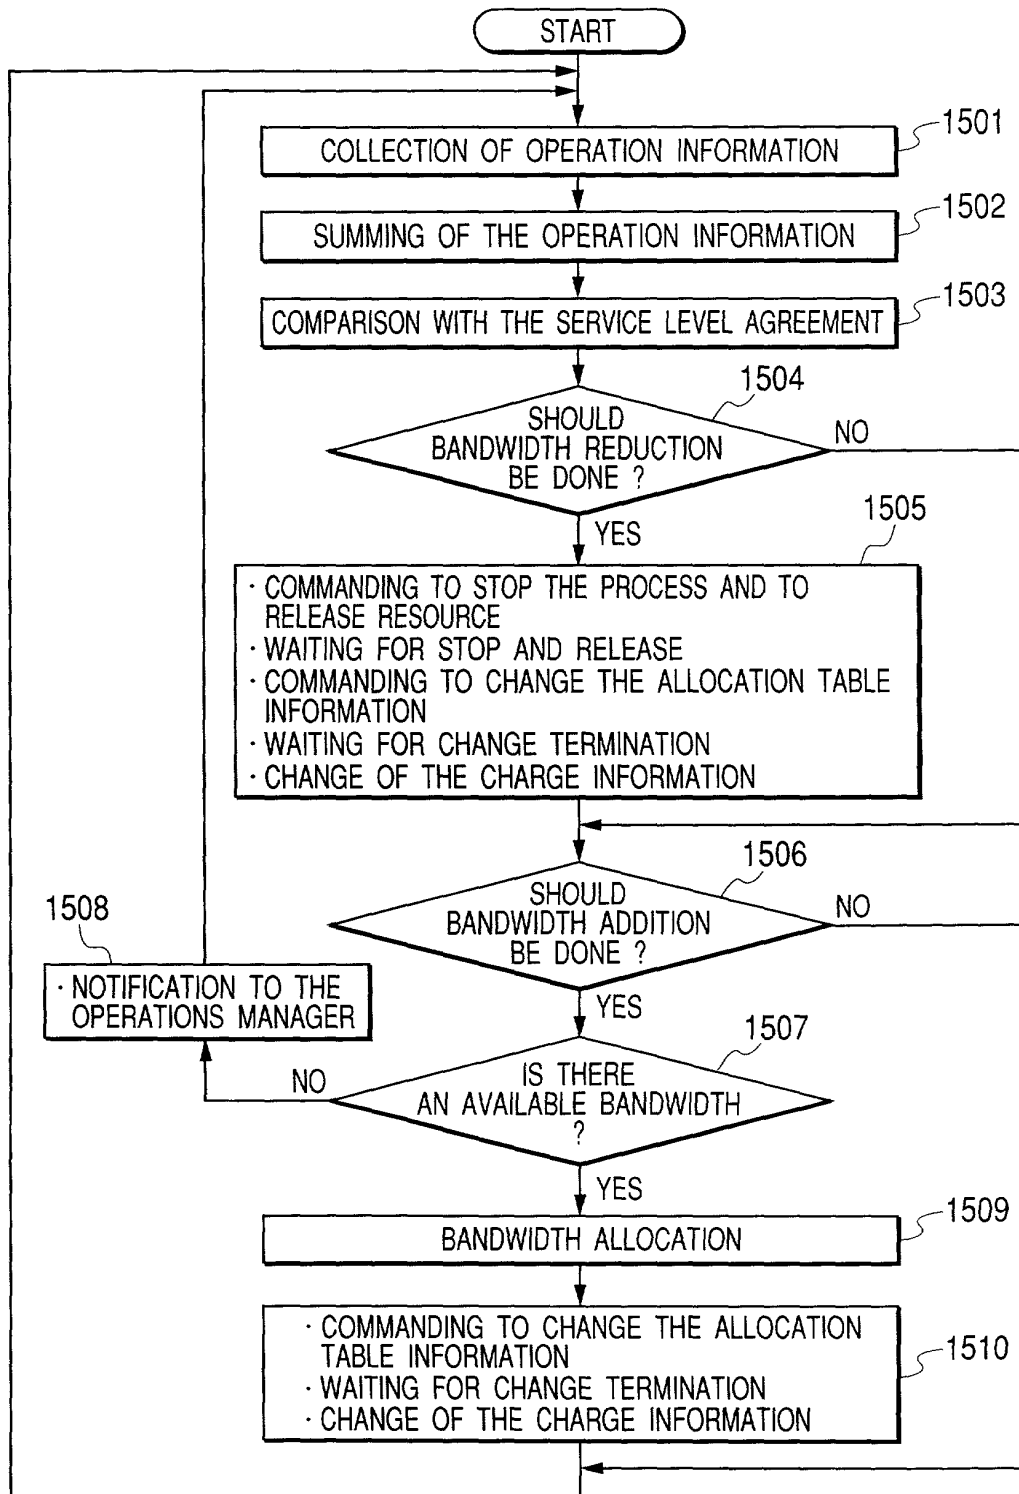


FIG. 16

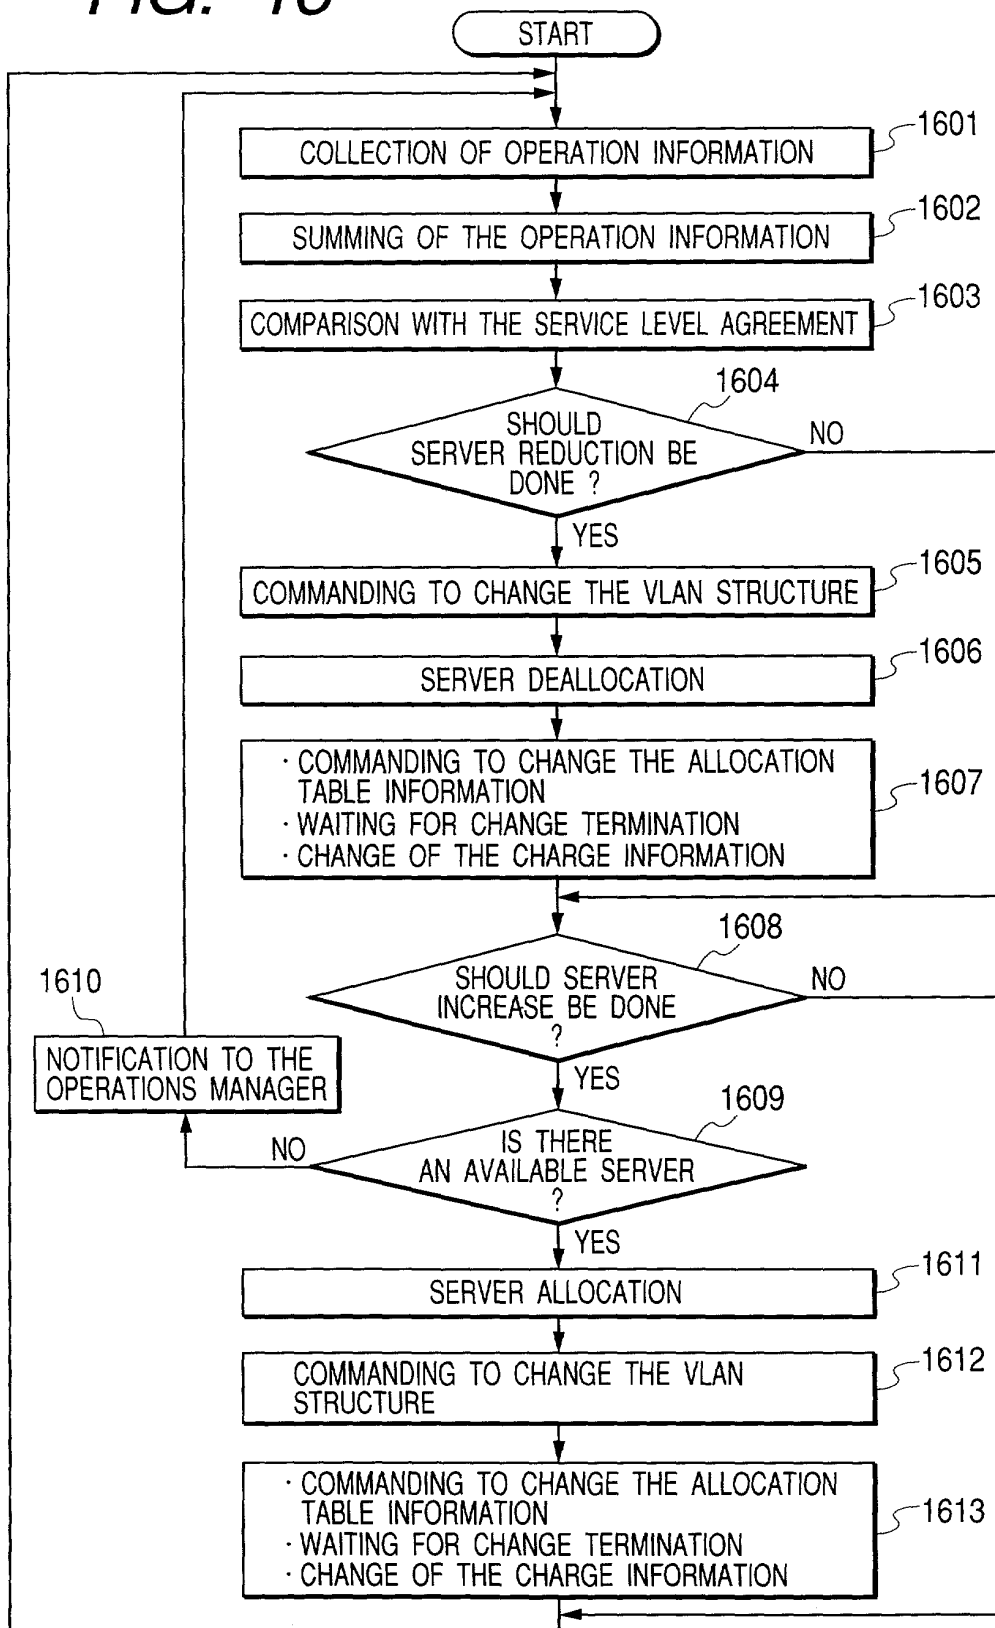


FIG. 17

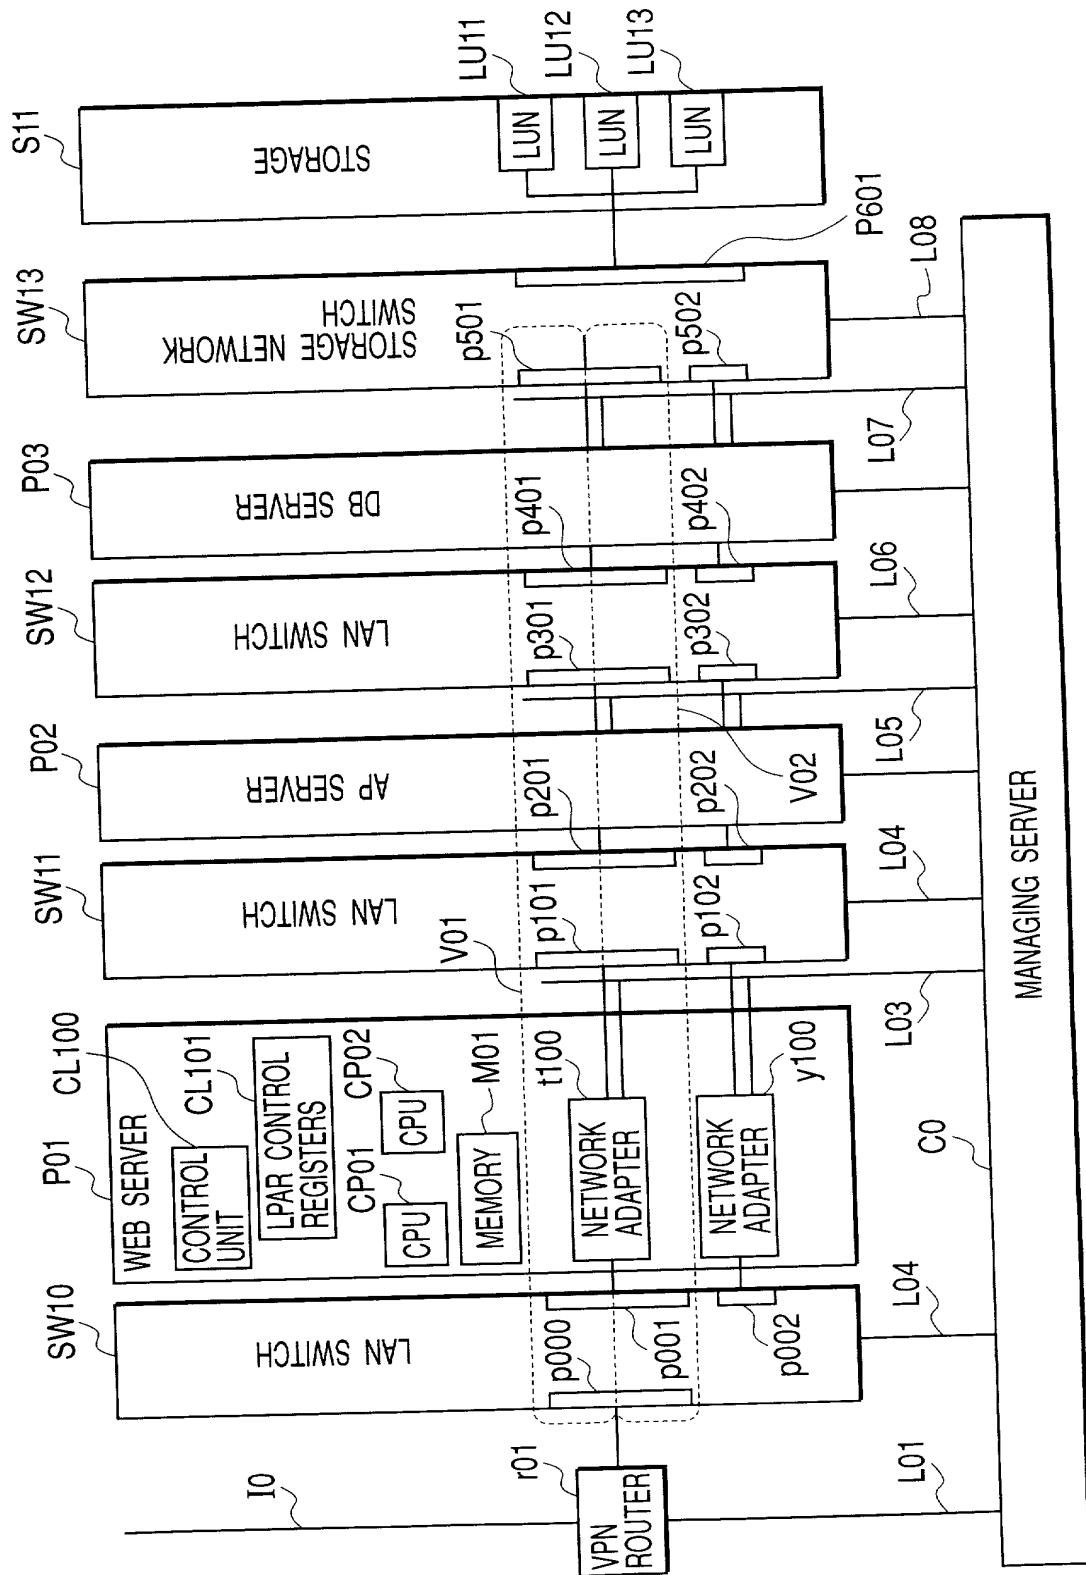


FIG. 18

U05

SERVICE LEVEL CONDITION INPUT SCREEN (OPTION SCREEN)

SECURITY OPTION SERVICE

· USER-DEDICATED VLAN AND VPN CONFIGURATION

RELIABILITY OPTION SERVICE

· NETWORK BANDWIDTH GUARANTEE CONFIGURATION

NOT REQUIRED ☐ REQUIRED ☒

NOT REQUIRED ☐ REQUIRED ☒

FIG. 19

U06

SERVICE LEVEL CONDITION INPUT SCREEN

ADDRESS WEB AP DB

USE SERVER TYPE ALLOCATION (PERCENTAGE) OF CPU USE CONDITION

		LOWER LIMIT	UPPER LIMIT	CPU UTILIZATION	..
WEB SERVER	<input checked="" type="checkbox"/>	20 %	70 %	BELOW 50%	<input type="text"/>
AP SERVER	<input checked="" type="checkbox"/>	20 %	70 %	BELOW 50%	<input type="text"/>
DB SERVER	<input checked="" type="checkbox"/>	20 %	70 %	BELOW 50%	<input type="text"/>

☒ VPN OPTION (FILL IN IF SELECTED)

NETWORK BANDWIDTH MINIMUM Mbps MAXIMUM Mbps USE CONDITION BANDWIDTH UTILIZATION

STORAGE NETWORK BANDWIDTH MINIMUM Mbps MAXIMUM Mbps USE CONDITION BANDWIDTH UTILIZATION

U07

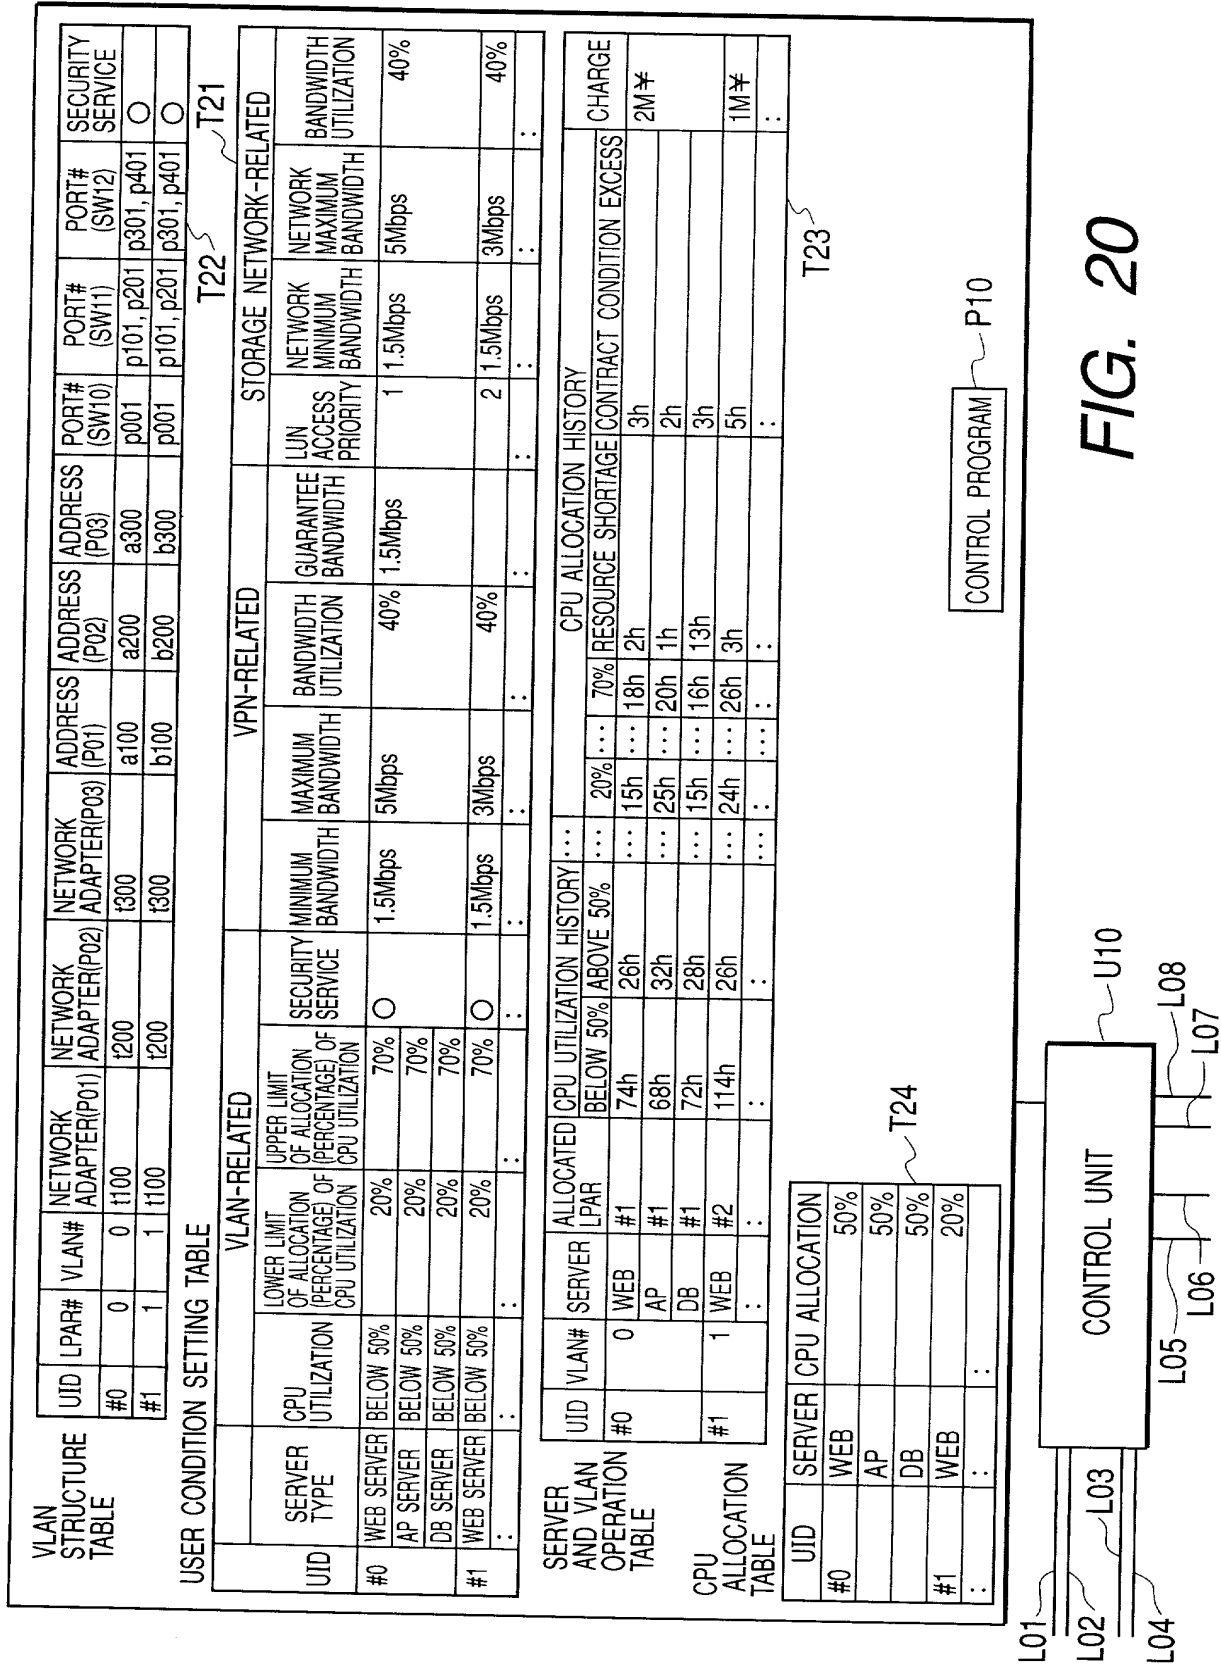


FIG. 21

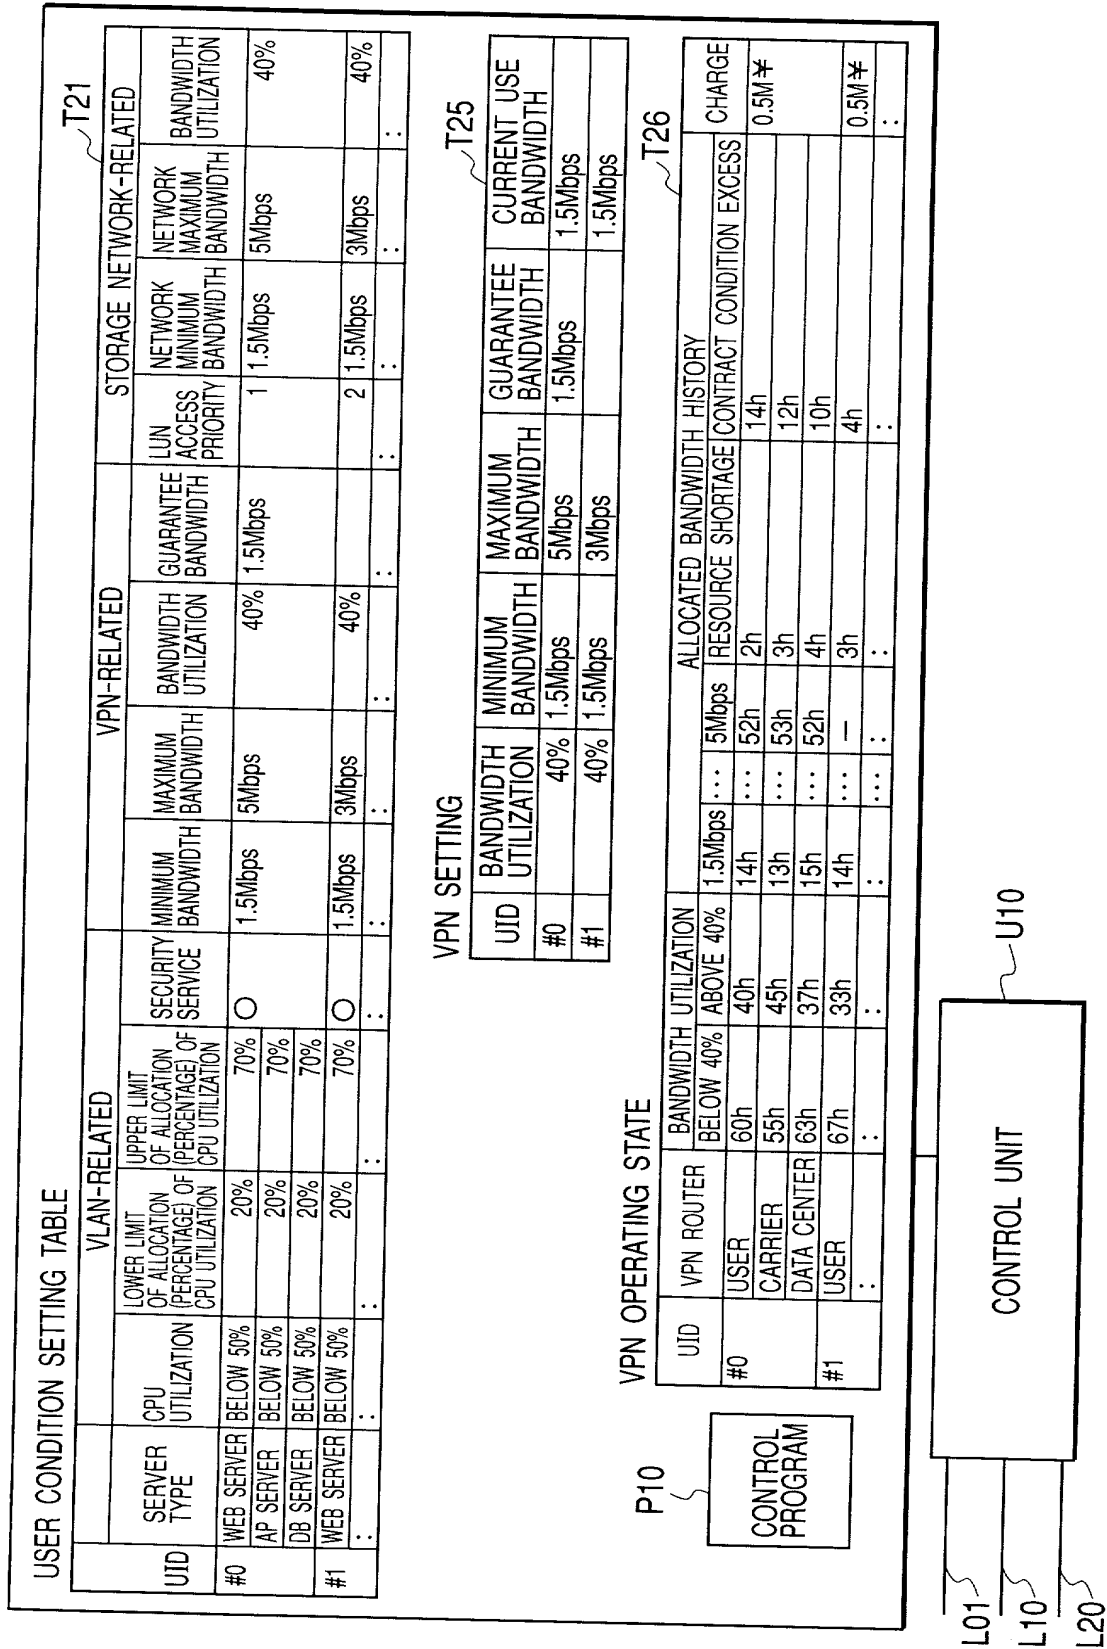


FIG. 22

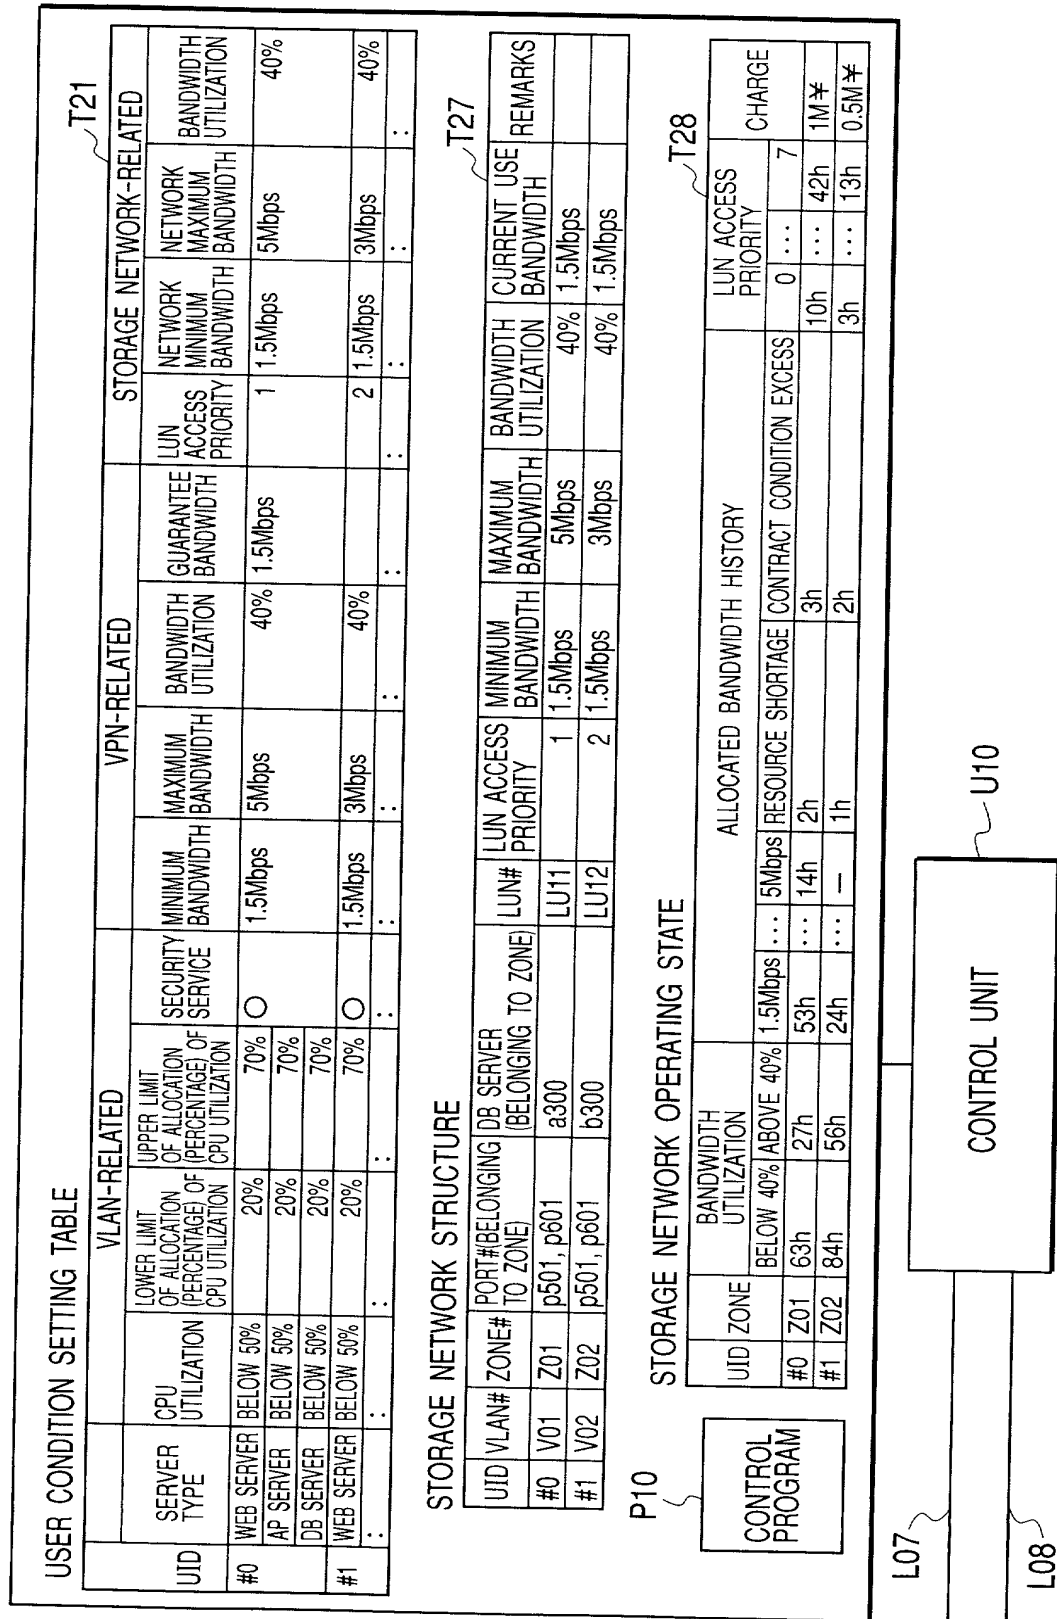


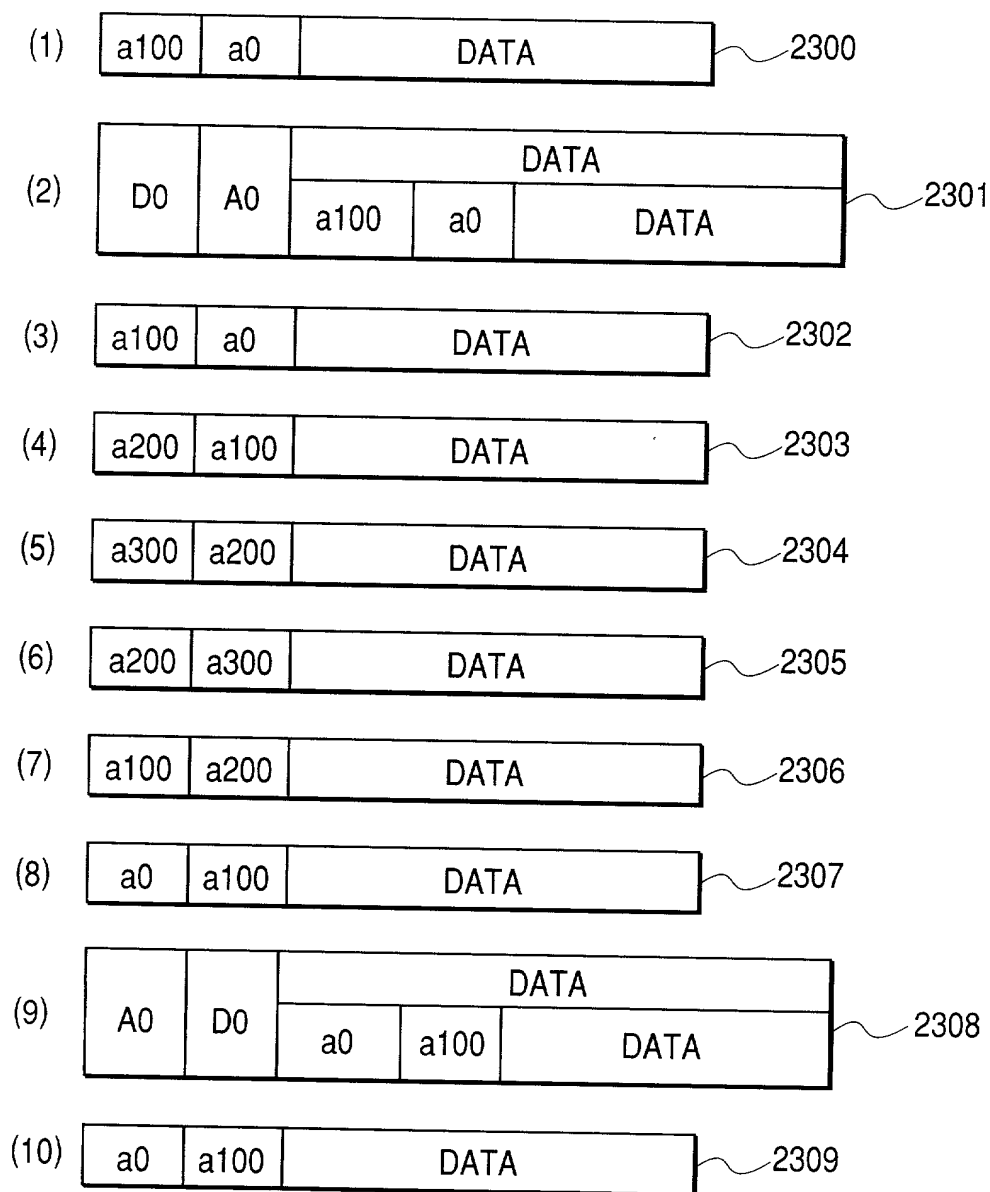
FIG. 23

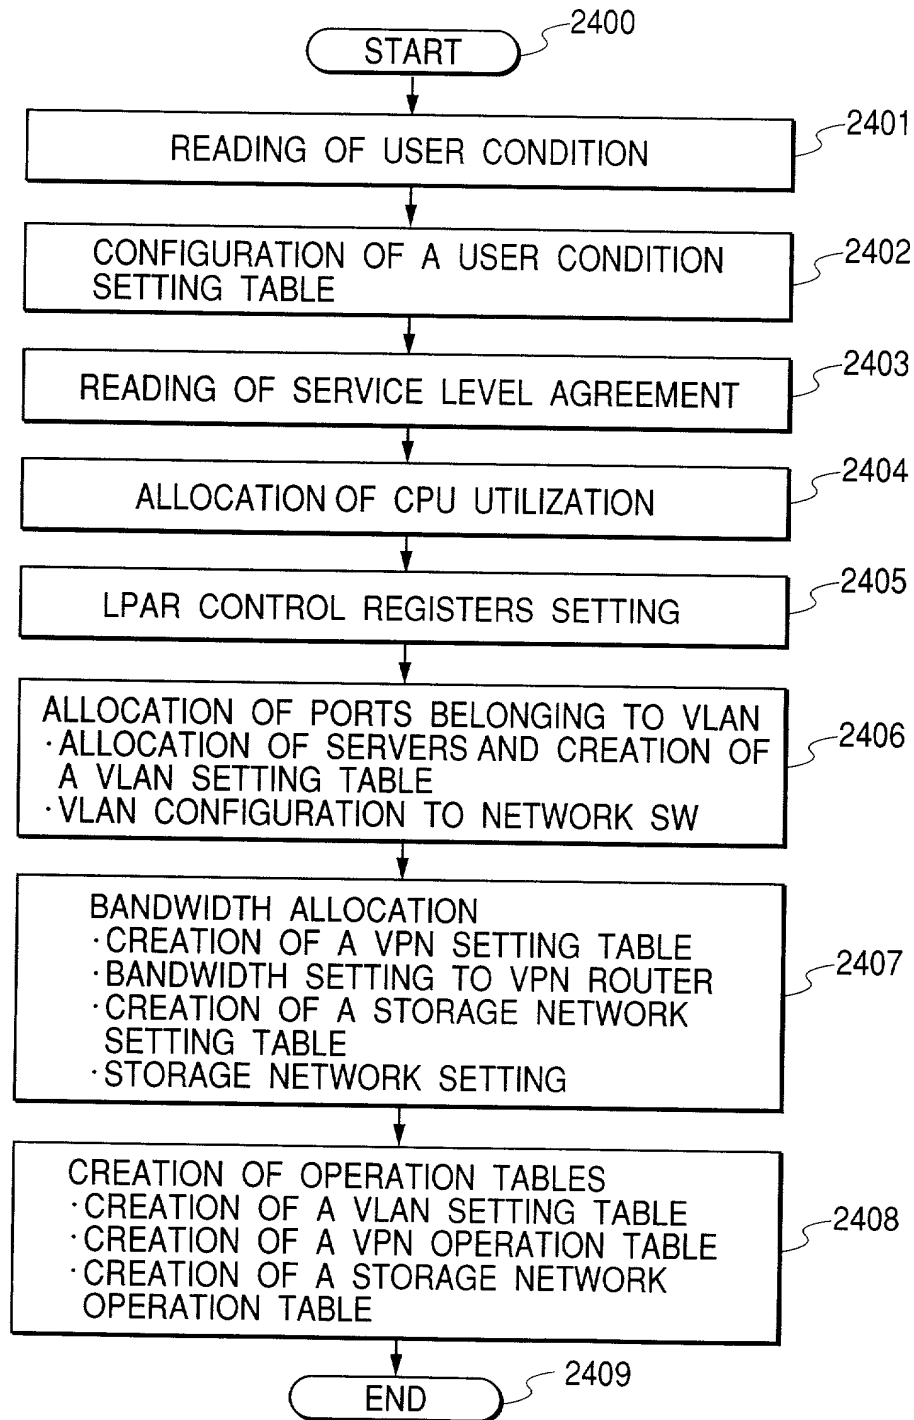
FIG. 24

FIG. 25

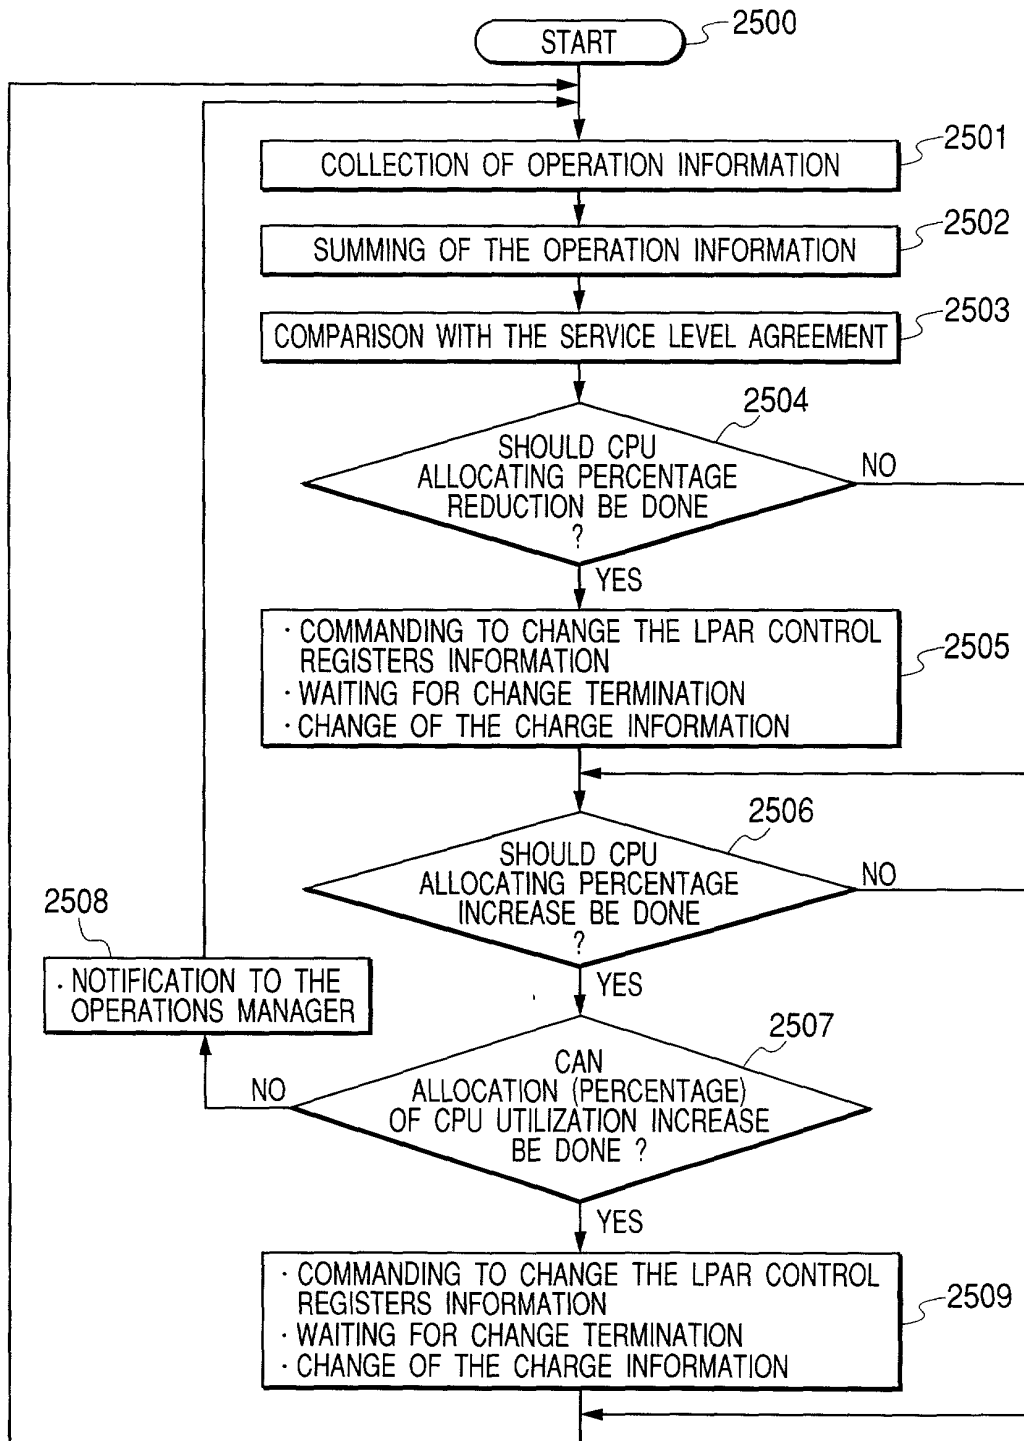


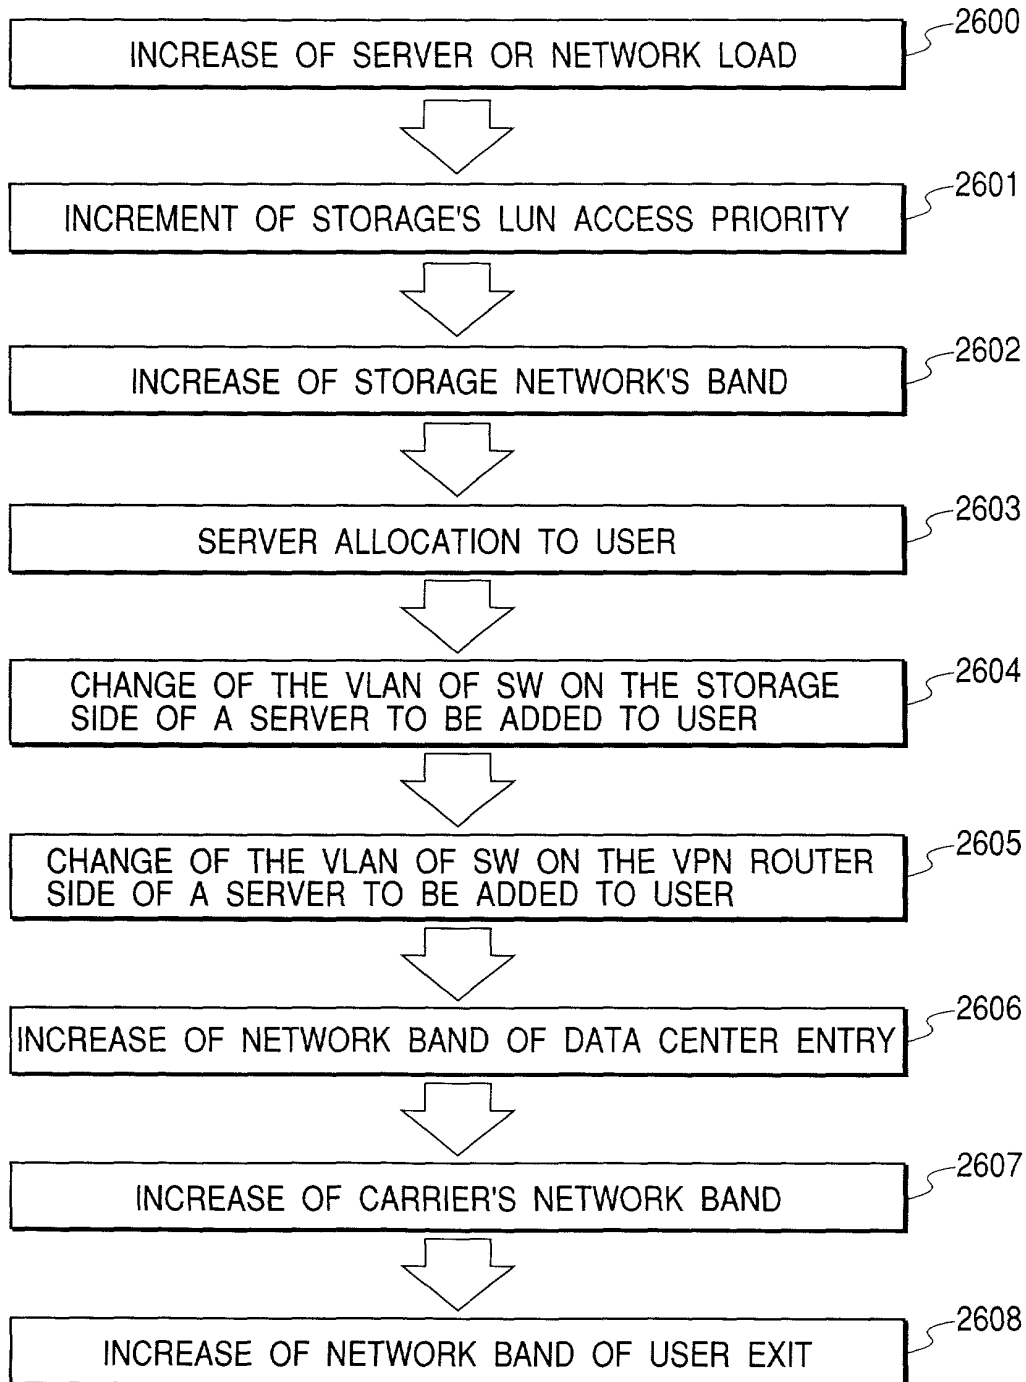
FIG. 26

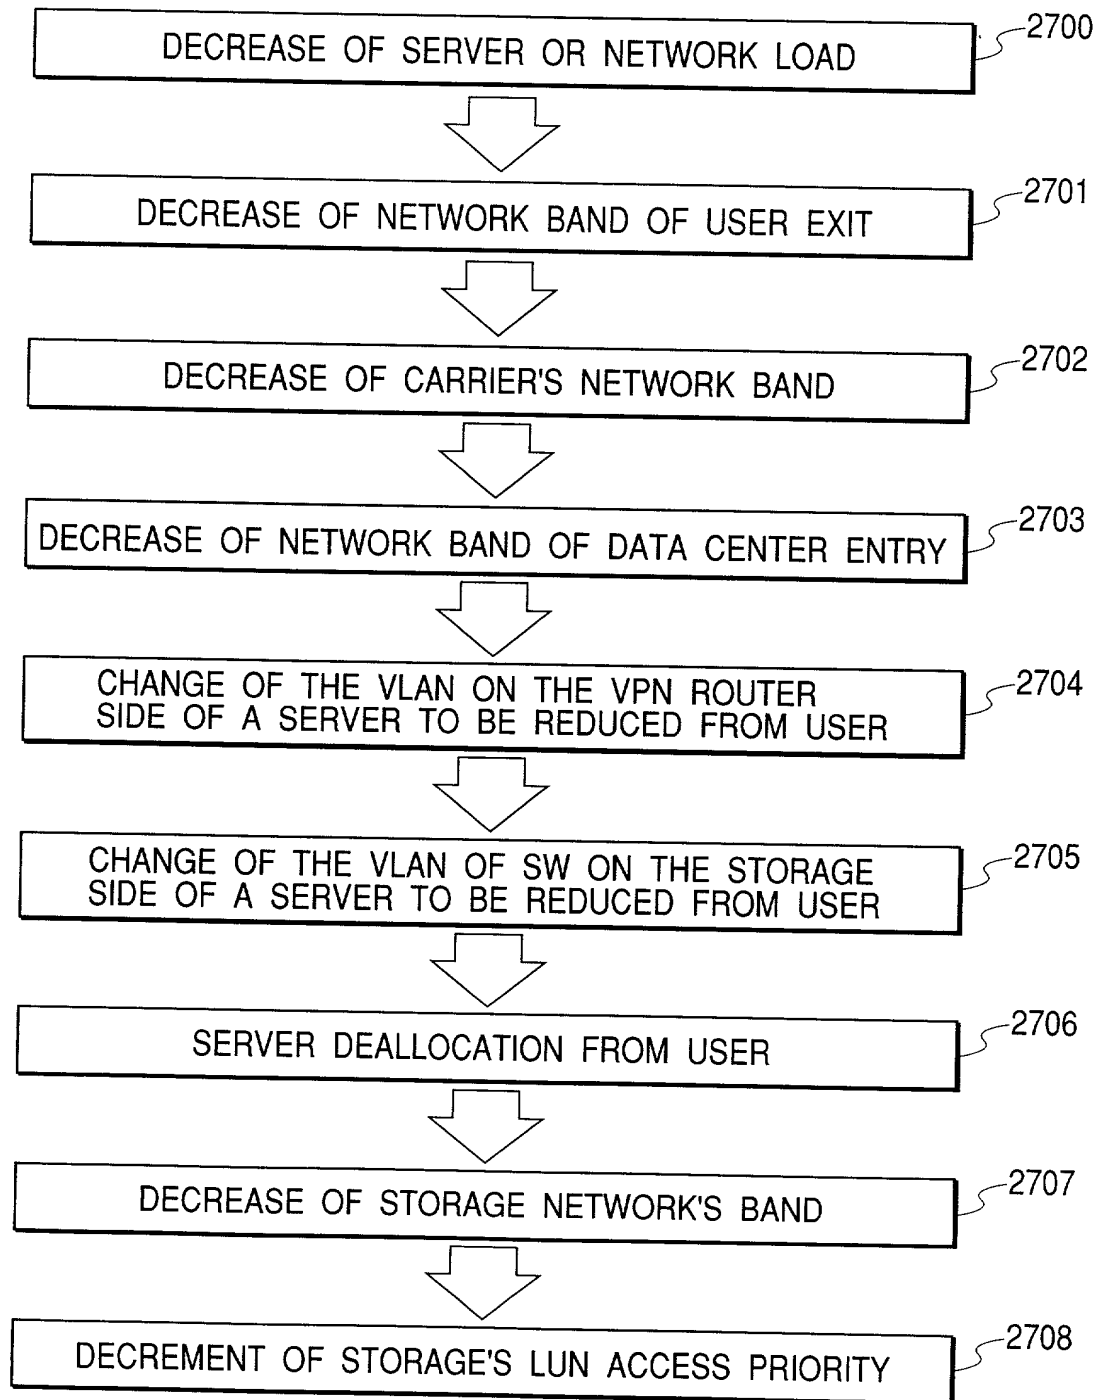
FIG. 27

FIG. 28

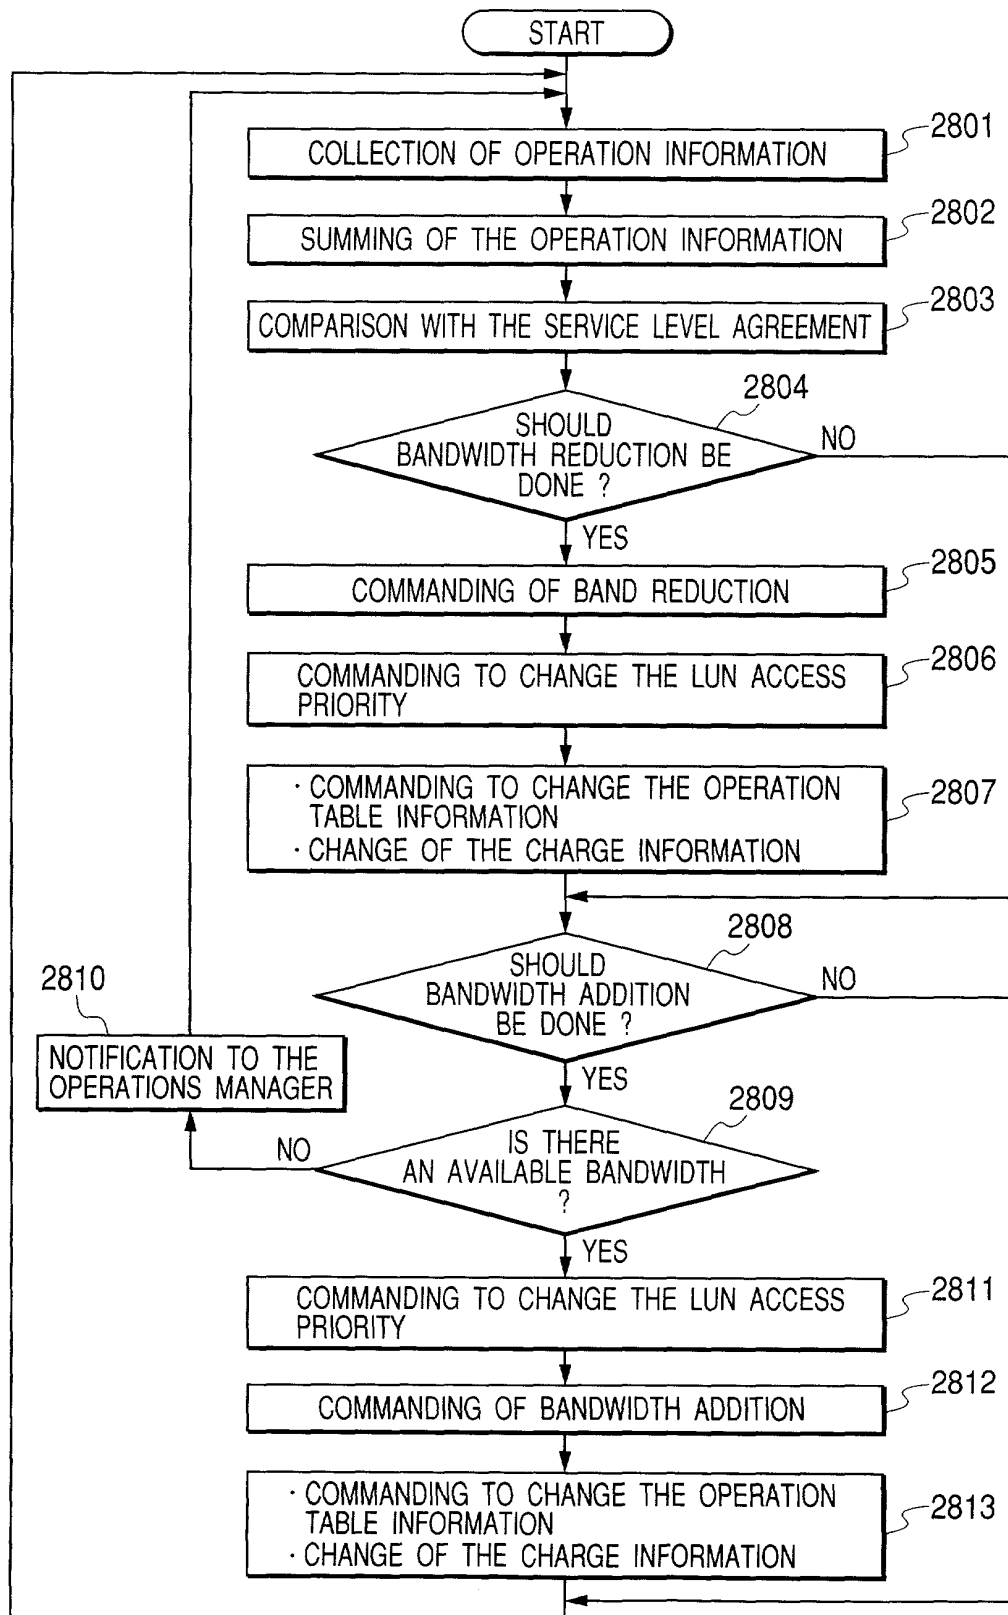


FIG. 29

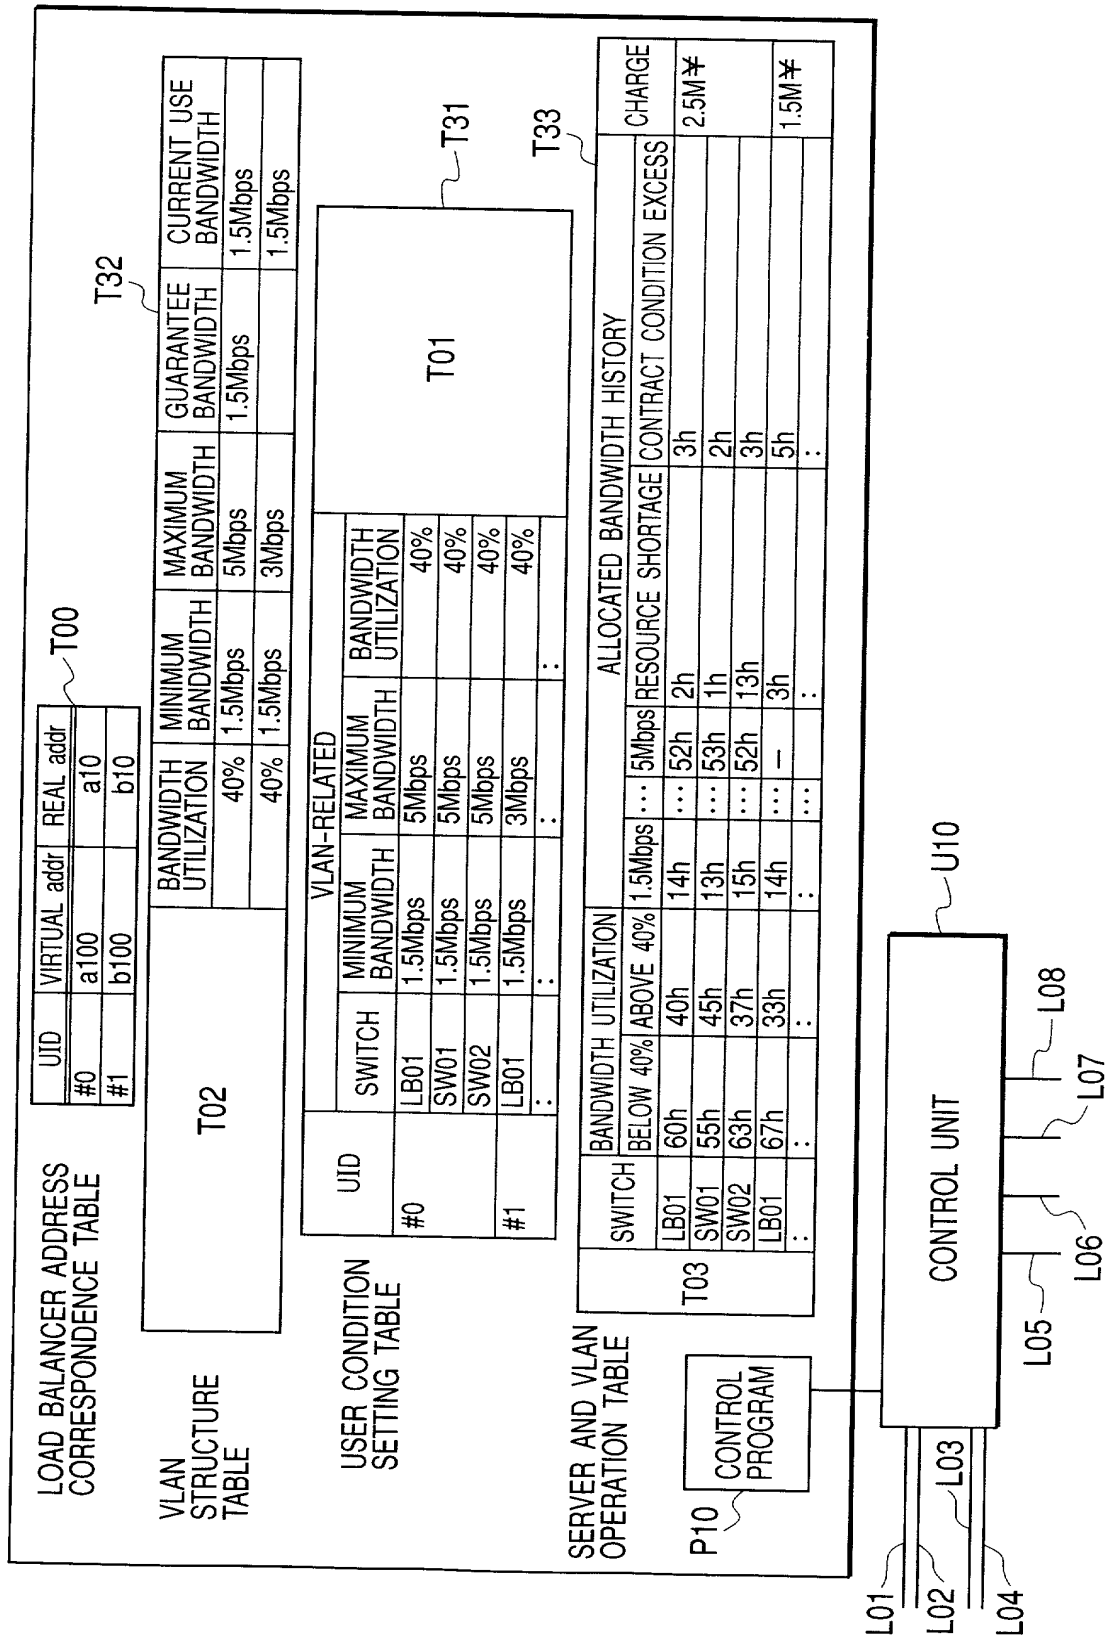


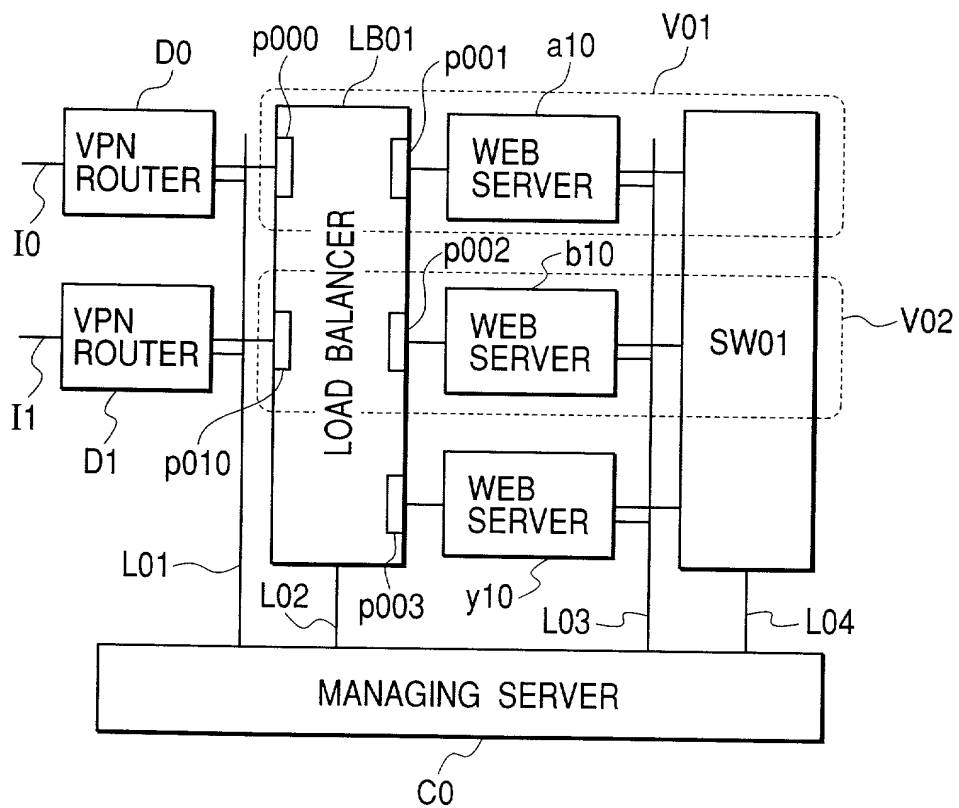
FIG. 30

FIG. 31

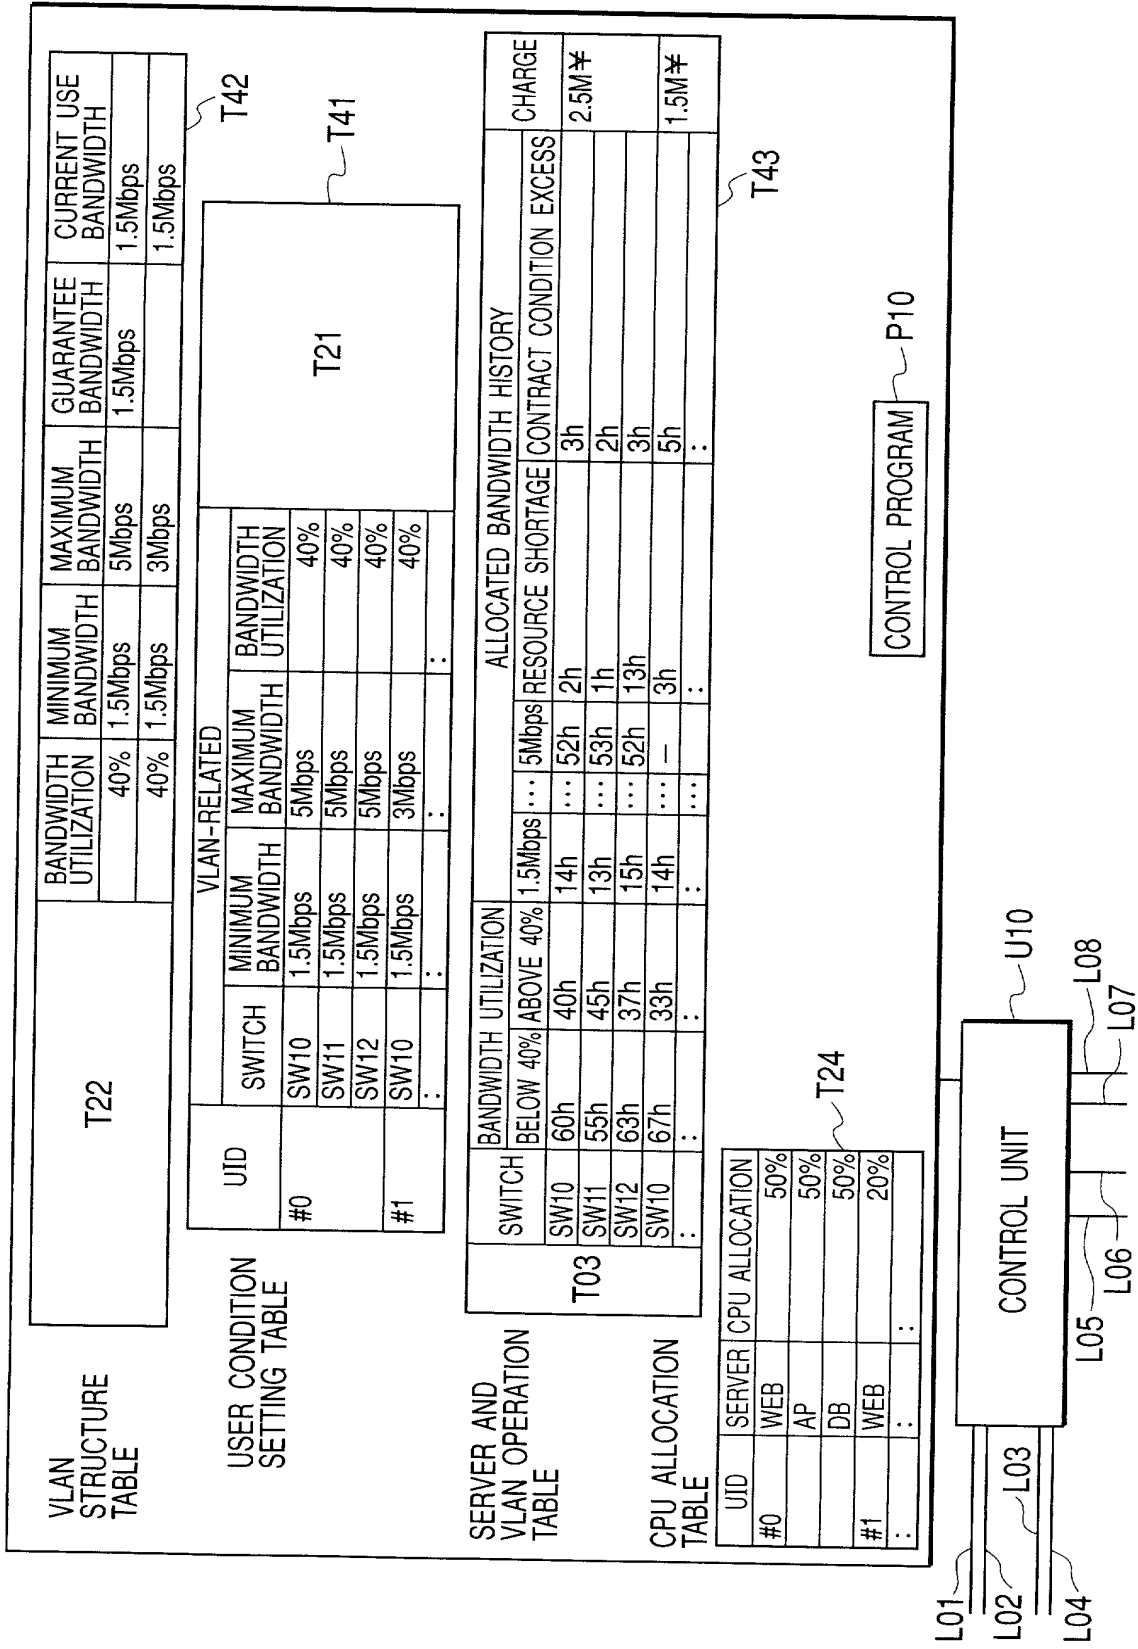


FIG. 32

